Wall

Oval Outdoor WL0073

Wall light

Wall light. 8 W. Four beam angles, 15° to 50°. 2700, 3000, 4000 K. IP65. 97 CRI.

- LED source: Citizen

Power **8 W**	Voltage **230 V AC**	Luminous flux **630 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **15°, 24°, 36°, 50°**
IP rating **IP65**	Certifications **CE**	Mounting **Surface, Wall**
Finishes **Black**		

Models

Code	Power	Voltage	Flux	CRI	Size	Beam
WL0073	8 W	230 V AC	630 lm	97 CRI	Ø70 × 108 mm	15° 24° 36° 50°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for WL0073, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

WL0073, 8 W, 15° beam

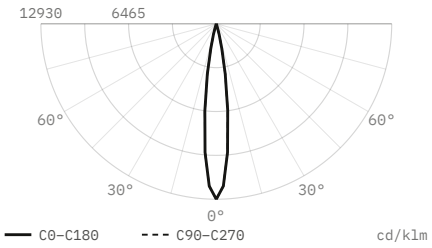

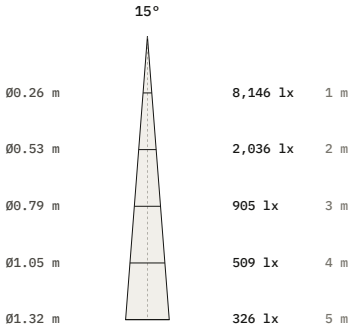

Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	8,146 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø70 × 108 mm
Data	Calculated from catalogue data

WL0073, 8 W, 24° beam

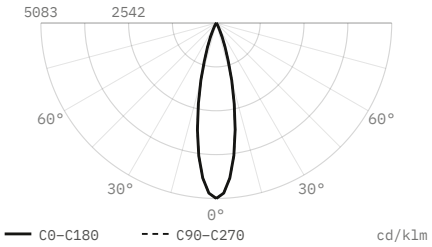

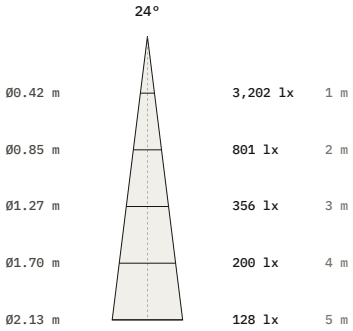

Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	3,202 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø70 × 108 mm
Data	Calculated from catalogue data

WL0073, 8 W, 36° beam

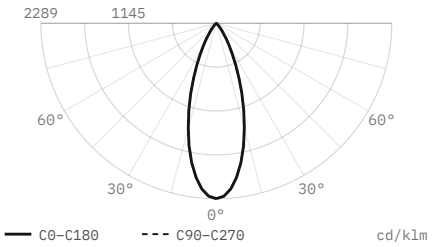

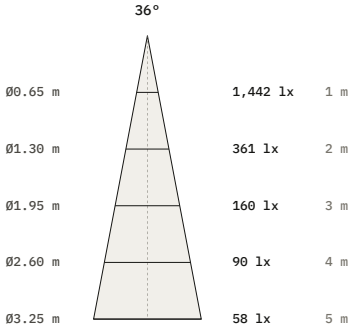

Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	1,442 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø70 × 108 mm
Data	Calculated from catalogue data

WL0073, 8 W, 50° beam

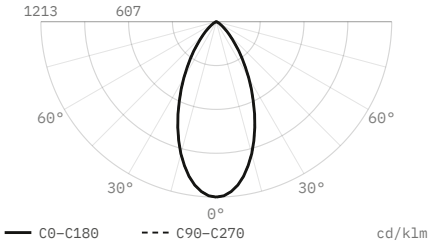

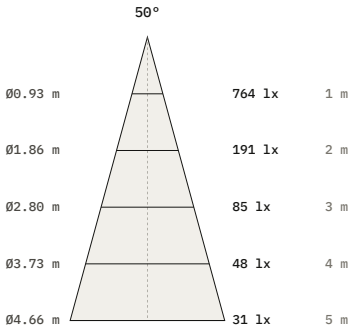

Luminous flux	630 lm
Efficacy	79 lm/W
Peak intensity	764 cd, 1,213 cd/klm
Beam angle (50%)	50°
Field angle (10%)	91.1°
Cut-off angle (2.5%)	57.5°
Flux 0–30° / 30–60° / 60–90°	64.8 / 33.6 / 1.5 %
Size	Ø70 × 108 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.