

Suspended

P3-3026

Pendant




Pendant. 50 W. Four beam angles, 15° to 55°. 3000, 4000 K. IP65. 97 CRI.

— LED source: Citizen

Power 50 W	Luminous flux 4300–4400 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 38°, 55°	IP rating IP65
Certifications CE, RoHS, EMC, LVD	Mounting Suspended	Control DALI, 0-10V, Triac, Casambi

Finishes
White, Black, Grey

Dimensions

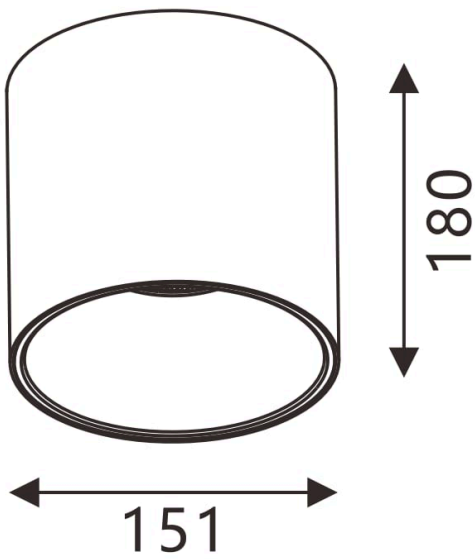

Models

Code	Power	Flux	CRI	Size	Beam
P3-3026	50 W	4300–4400 lm	97 CRI	Ø151 x H180 mm	15° 24° 38° 55°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


50 W

38°			55°		
Ø0.80 m	7,025 lx	1 m	Ø1.02 m	5,280 lx	1 m
Ø1.59 m	1,756 lx	2 m	Ø2.04 m	1,320 lx	2 m
Ø2.39 m	780 lx	3 m	Ø3.06 m	586 lx	3 m
Beam	1 m		2 m		3 m
38°	7,025 lx Ø800 mm		1,756 lx Ø1590 mm		780 lx Ø2390 mm
55°	5,280 lx Ø1020 mm		1,320 lx Ø2040 mm		586 lx Ø3060 mm

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-3026, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-3026, 50 W, 38° beam

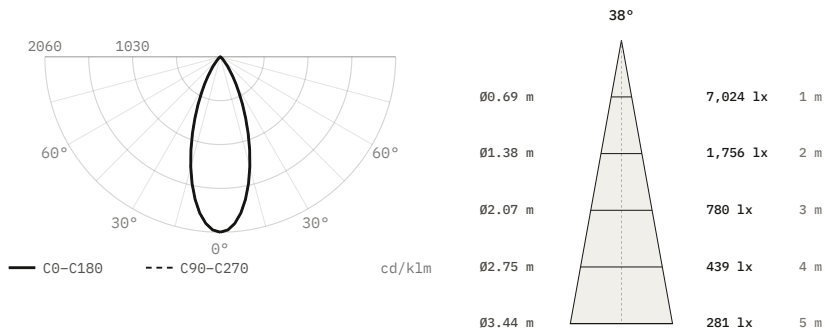


Luminous flux	3,410 lm
Efficacy	68 lm/W
Peak intensity	7,024 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	Ø151 × 180 mm
Data	Calculated from catalogue data

P3-3026, 50 W, 55° beam

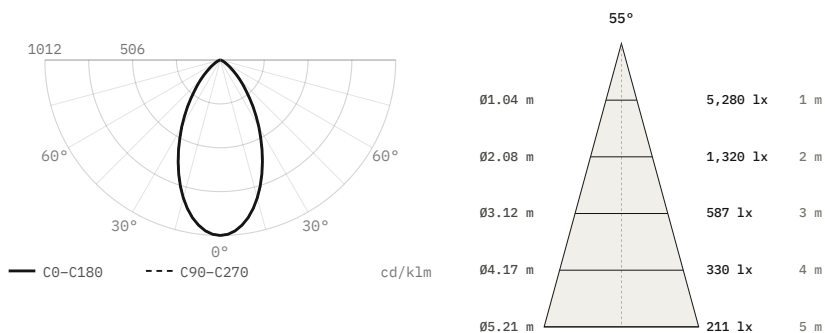


Luminous flux	5,215 lm
Efficacy	104 lm/W
Peak intensity	5,280 cd, 1,012 cd/klm
Beam angle (50%)	55°
Field angle (10%)	100.2°
Cut-off angle (2.5%)	63°
Flux 0–30° / 30–60° / 60–90°	58.2 / 38.8 / 3 %
Size	Ø151 × 180 mm
Data	Calculated from catalogue data

P3-3026, 50 W, 15° beam

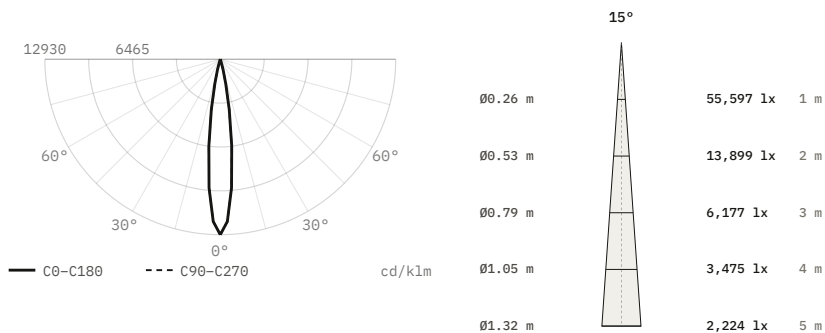

Luminous flux	4,300 lm
Efficacy	86 lm/W
Peak intensity	55,597 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø151 × 180 mm
Data	Calculated from catalogue data

P3-3026, 50 W, 24° beam

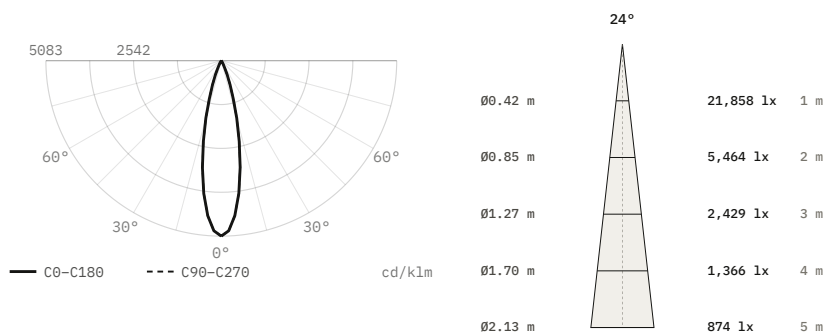

Luminous flux	4,300 lm
Efficacy	86 lm/W
Peak intensity	21,858 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø151 × 180 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.