

Suspended

P3-4009

Pendant




Pendant. 6 W. Three beam angles, 15° to 36°. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 6 W	Luminous flux 400–450 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Suspended	Control DALI, 0-10V, Triac, Casambi
Finishes White, Black, Grey		


Dimensions

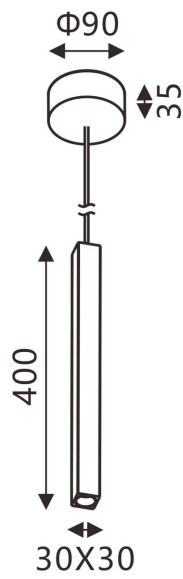

Models

Code	Power	Flux	CRI	Size	Beam
P3-4009	6 W	400-450 lm	97 CRI	30 × 30 × 400 mm	15° 24° 36°


Finishes

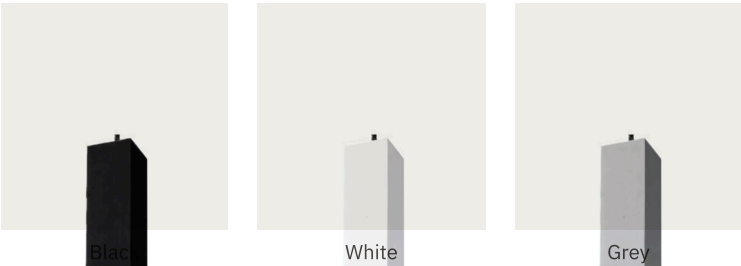

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

6 W

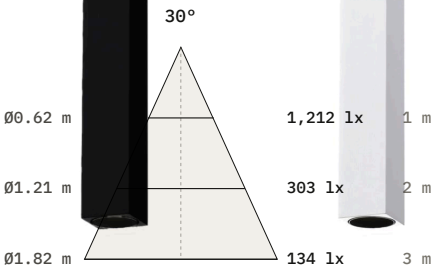


Beam	1 m	2 m	3 m
30°	1,212 lx Ø620 mm	303 lx Ø1210 mm	134 lx Ø1820 mm

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-4009, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-4009, 6 W, 30° beam

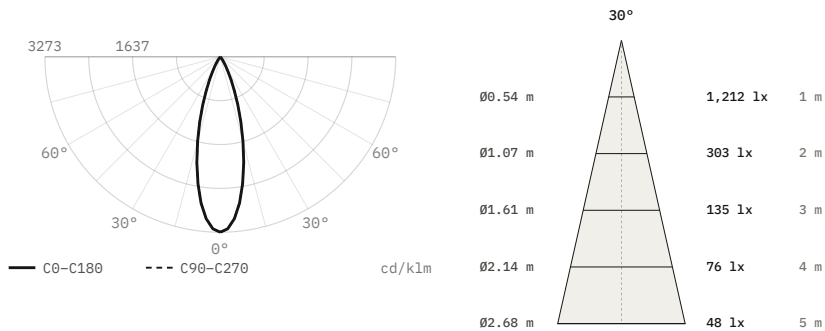


Luminous flux	370 lm
Efficacy	62 lm/W
Peak intensity	1,212 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	30 × 30 × 400 mm
Data	Calculated from catalogue data

P3-4009, 6 W, 15° beam

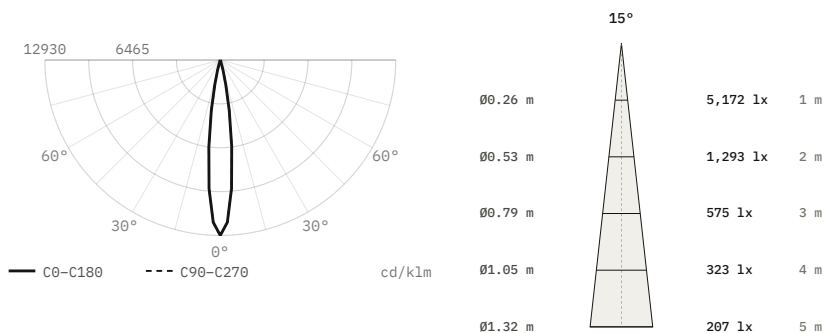


Luminous flux	400 lm
Efficacy	67 lm/W
Peak intensity	5,172 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	30 × 30 × 400 mm
Data	Calculated from catalogue data

P3-4009, 6 W, 24° beam

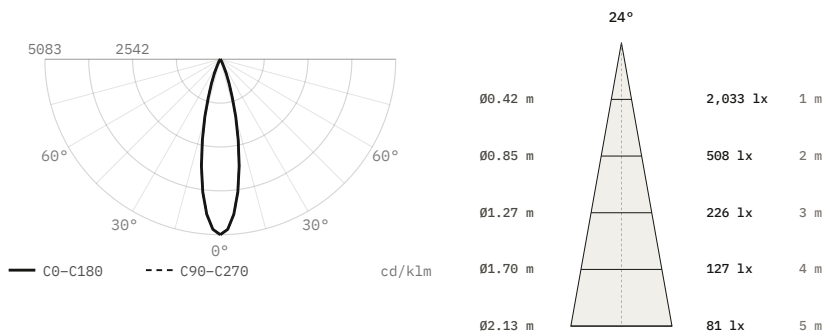

Luminous flux	400 lm
Efficacy	67 lm/W
Peak intensity	2,033 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	30 × 30 × 400 mm
Data	Calculated from catalogue data

P3-4009, 6 W, 36° beam

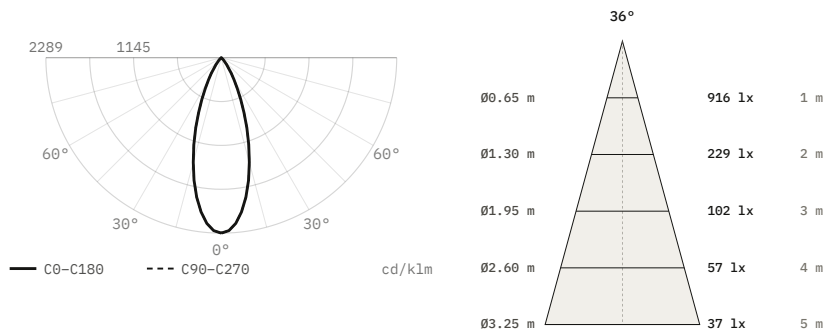

Luminous flux	400 lm
Efficacy	67 lm/W
Peak intensity	916 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0-30° / 30-60° / 60-90°	86.1 / 13.9 / 0 %
Size	30 × 30 × 400 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.