

Suspended

P3-4011

Pendant




Pendant. 10 W. Three beam angles, 15° to 36°. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 10 W	Luminous flux 800–900 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Suspended	Control DALI, 0-10V, Triac, Casambi
Finishes White, Black, Grey		

Dimensions

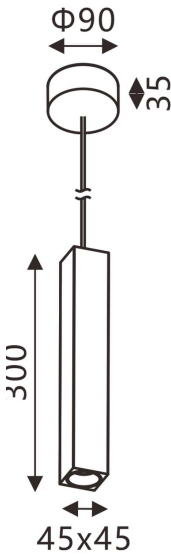


Models

Code	Power	Flux	CRI	Size	Beam
P3-4011	10 W	800–900 lm	97 CRI	45 × 45 × 300 mm	15° 24° 36°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


10 W

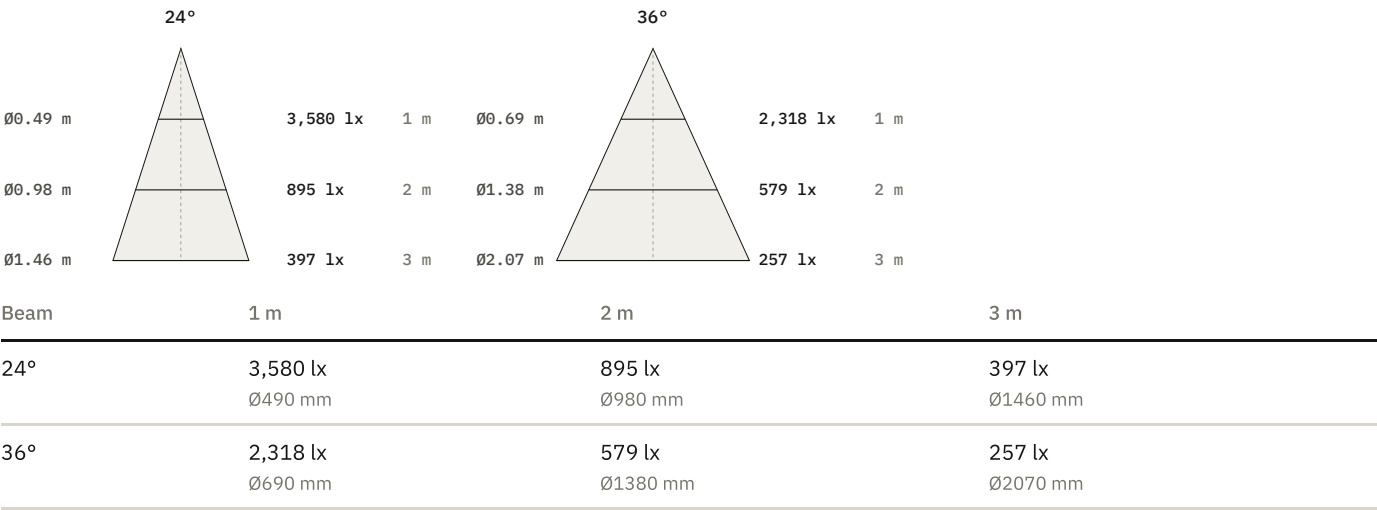

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-4011, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-4011, 10 W, 24° beam

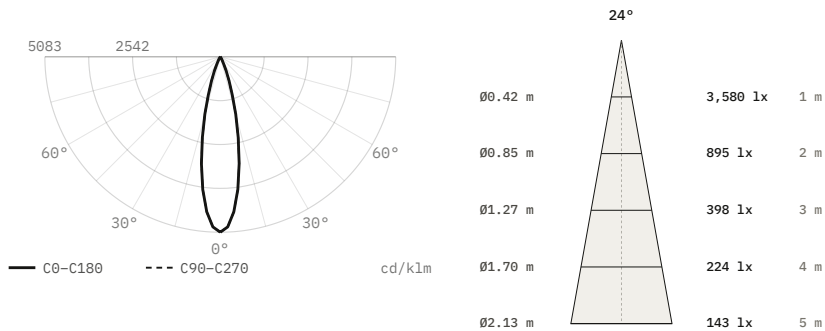


Luminous flux	704 lm
Efficacy	70 lm/W
Peak intensity	3,580 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	45 × 45 × 300 mm
Data	Calculated from catalogue data

P3-4011, 10 W, 36° beam

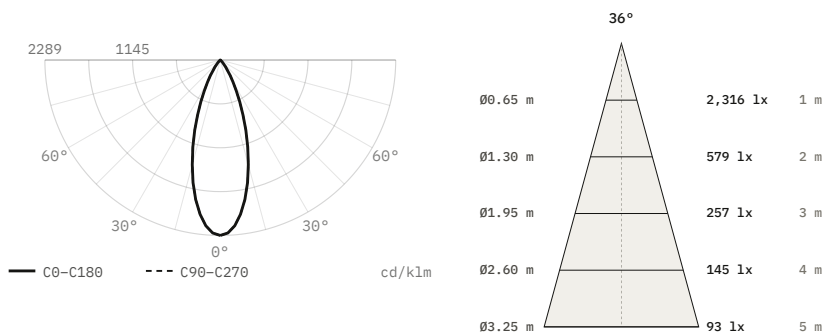

Luminous flux	1,012 lm
Efficacy	101 lm/W
Peak intensity	2,316 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	45 × 45 × 300 mm
Data	Calculated from catalogue data

P3-4011, 10 W, 15° beam

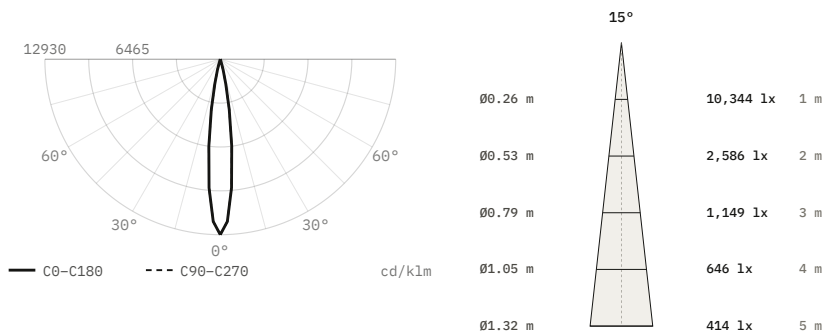

Luminous flux	800 lm
Efficacy	80 lm/W
Peak intensity	10,344 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	45 × 45 × 300 mm
Data	Calculated from catalogue data

