

Suspended

P3-4016

Pendant




Pendant. 35 W. Four beam angles, 15° to 60°. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 35 W	Luminous flux 3500–3600 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°, 60°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Suspended	Control DALI-2, 0-10V, Triac, Casambi

Finishes
White, Black, Grey

Dimensions

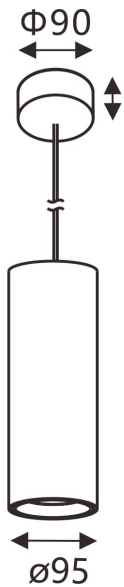


Models

Code	Power	Flux	CRI	Size	Beam
P3-4016	35 W	3500–3600 lm	97 CRI	$\varnothing 95 \times 240$ mm; canopy $\varnothing 90 \times 35$ mm	15° 24° 36° 60°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


35 W

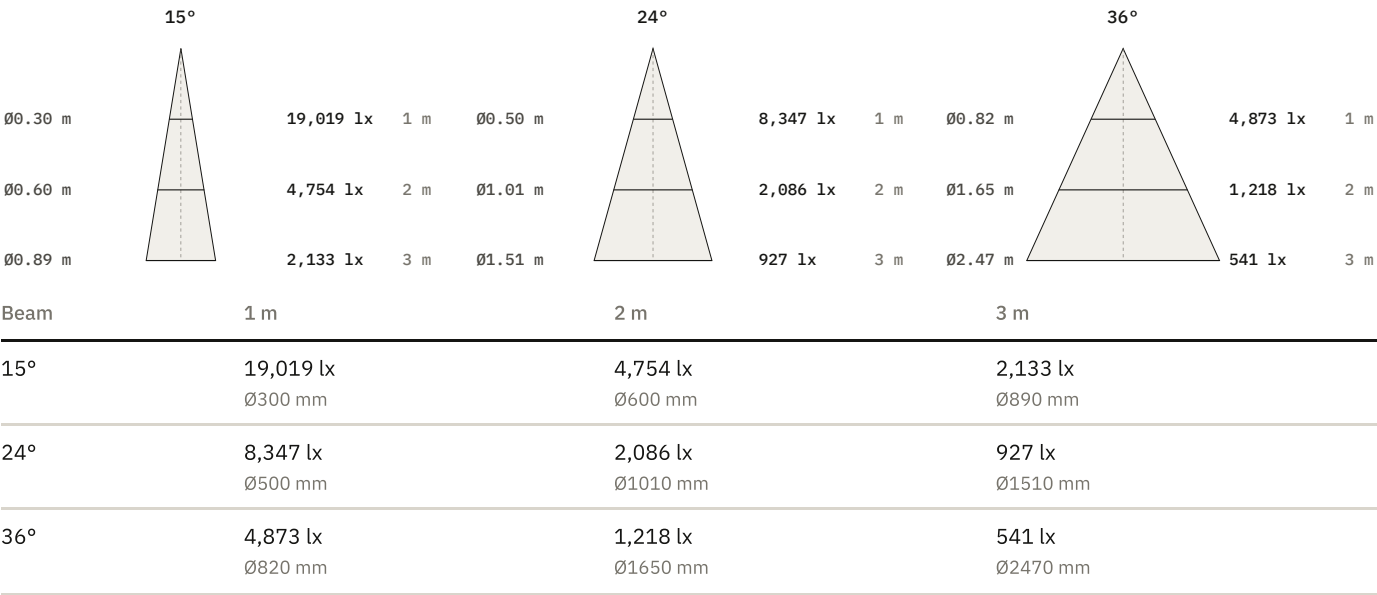

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-4016, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-4016, 35 W, 15° beam

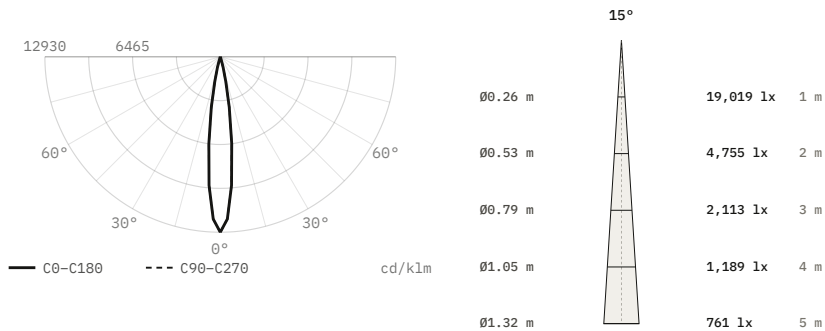


Luminous flux	1,471 lm
Efficacy	42 lm/W
Peak intensity	19,019 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø95 × 240 mm
Data	Calculated from catalogue data

P3-4016, 35 W, 24° beam

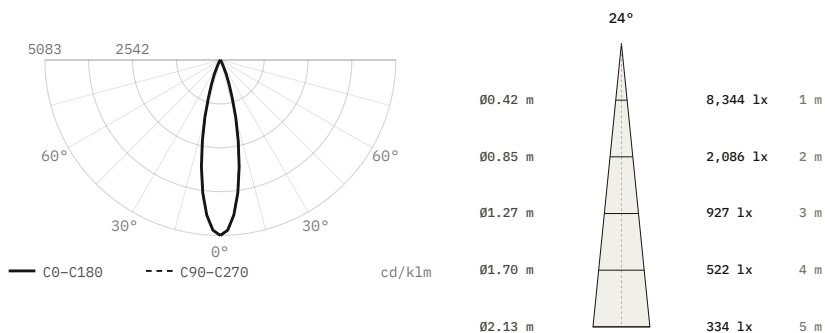


Luminous flux	1,641 lm
Efficacy	47 lm/W
Peak intensity	8,344 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø95 × 240 mm
Data	Calculated from catalogue data

P3-4016, 35 W, 36° beam

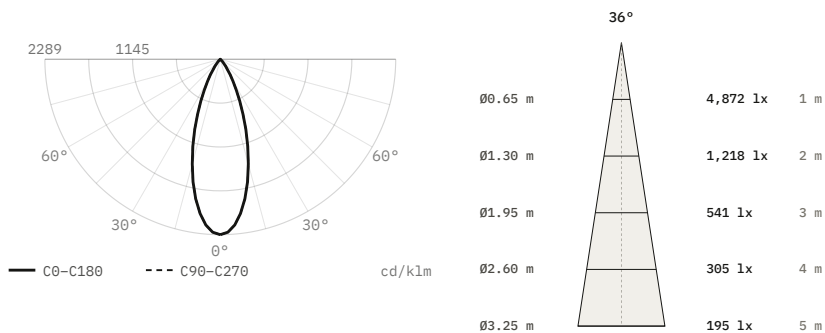

Luminous flux	2,128 lm
Efficacy	61 lm/W
Peak intensity	4,872 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø95 × 240 mm
Data	Calculated from catalogue data

P3-4016, 35 W, 60° beam

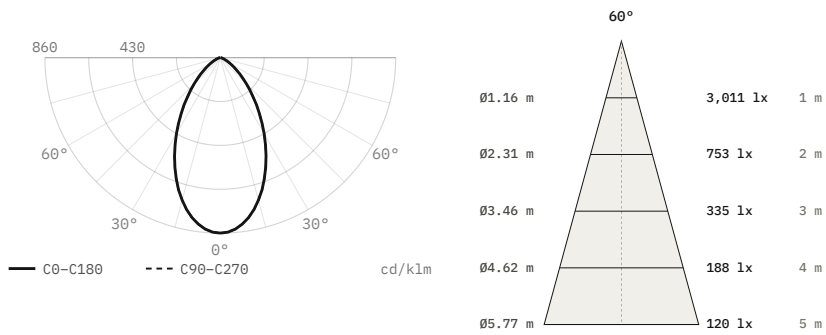

Luminous flux	3,500 lm
Efficacy	100 lm/W
Peak intensity	3,011 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0-30° / 30-60° / 60-90°	52.4 / 42.6 / 5 %
Size	Ø95 × 240 mm
Data	Calculated from catalogue data