

Suspended

P3-4215

Pendant




Pendant. 30 W. 15° or 60° beam. 3000, 4000 K. 97 CRI. — LED source: Citizen

Power 30 W	Luminous flux 3100–3200 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 60°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Suspended	Control DALI, 0-10V, Triac, Casambi

Finishes
White, Black, Grey


Dimensions

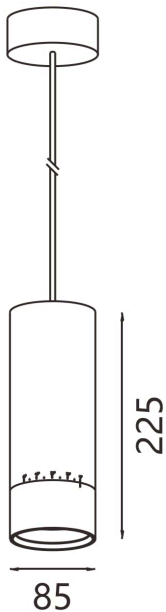

Models

Code	Power	Flux	CRI	Size	Beam
P3-4215	30 W	3100-3200 lm	97 CRI	85 × 225 mm	15° 60°


Finishes

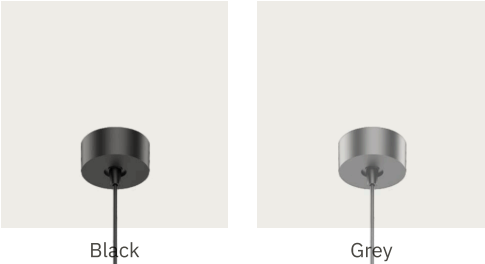

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

30 W

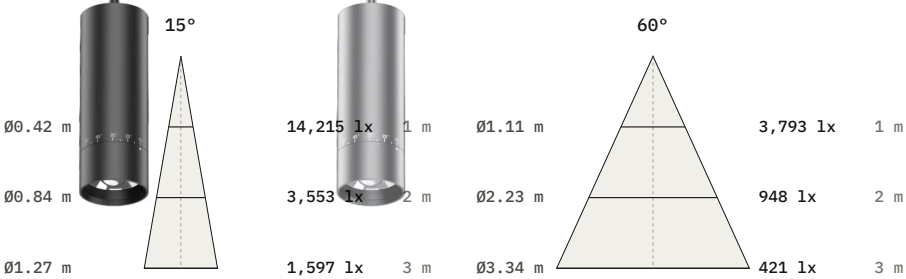


Beam	1 m	2 m	3 m
15°	14,215 lx Ø420 mm	3,553 lx Ø840 mm	1,597 lx Ø1270 mm
60°	3,793 lx Ø1110 mm	948 lx Ø2230 mm	421 lx Ø3340 mm


Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-4215, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-4215, 30 W, 15° beam

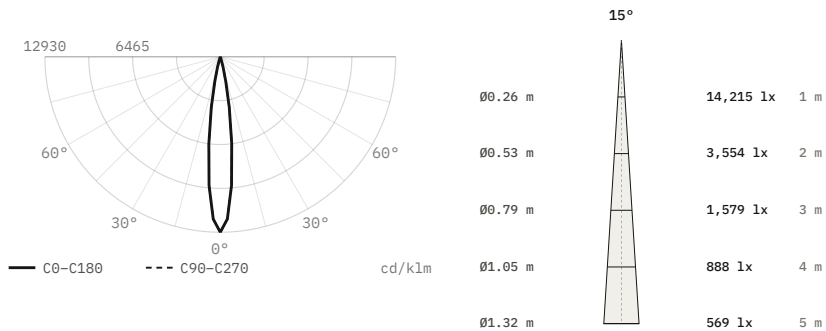

P3-4215, 30 W, 60° beam

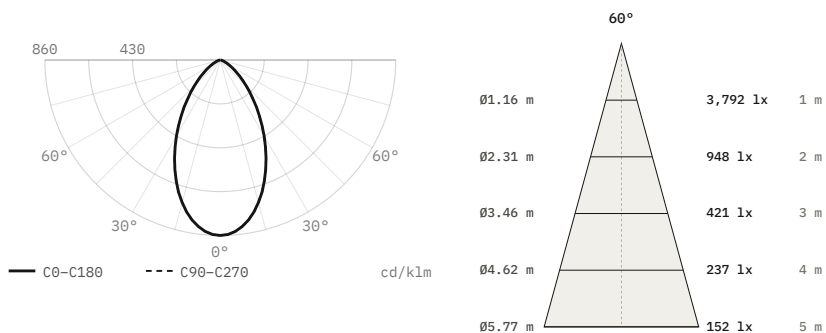

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.