Suspended

P3-4313

Pendant

Pendant. 15 W. 15° or 60° beam. 3000, 4000 K. 97 CRI.

– LED source: Citizen

Power **15 W**	Luminous flux **1500–1600 lm**	Colour temperature **3000 K, 4000 K**
CRI **97 CRI**	Beam angles **15°, 60°**	IP rating **IP20**
Certifications **CE, RoHS, EMC, LVD**	Mounting **Suspended**	Control **DALI, 0-10V, Triac, Casambi**
Finishes **White, Black, Grey**		

Dimensions

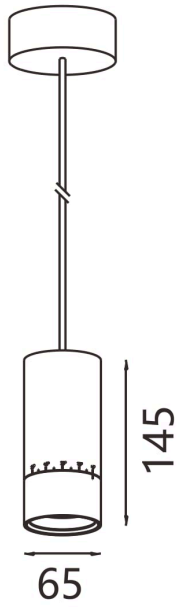

Models

Code	Power	Flux	CRI	Size	Beam
P3-4313	15 W	1500–1600 lm	97 CRI	65 × 145 mm	15° 60°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

15 W

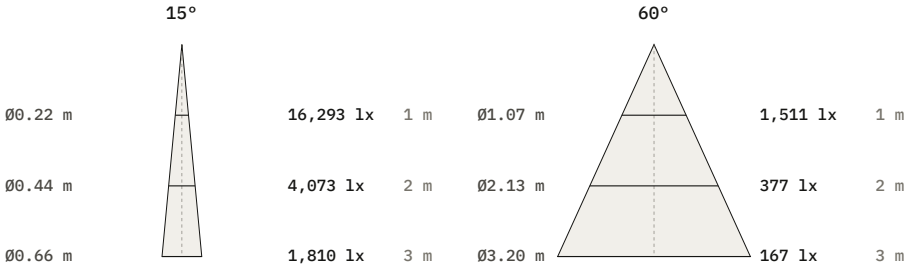

Beam	1 m	2 m	3 m
15°	16,293 lx Ø220 mm	4,073 lx Ø440 mm	1,810 lx Ø660 mm
60°	1,511 lx Ø1070 mm	377 lx Ø2130 mm	167 lx Ø3200 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-4313, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-4313, 15 W, 15° beam

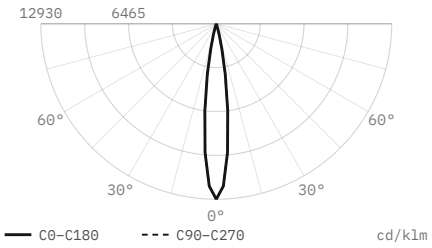

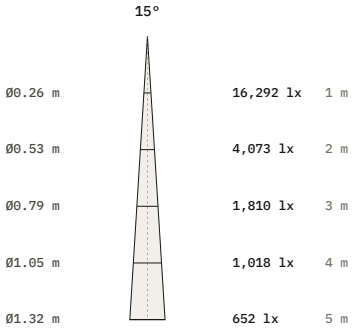

Luminous flux	1,260 lm
Efficacy	84 lm/W
Peak intensity	16,292 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	145 × 65 mm
Data	Calculated from catalogue data

P3-4313, 15 W, 60° beam

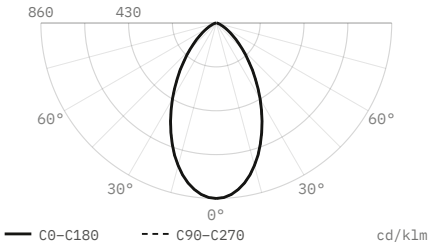

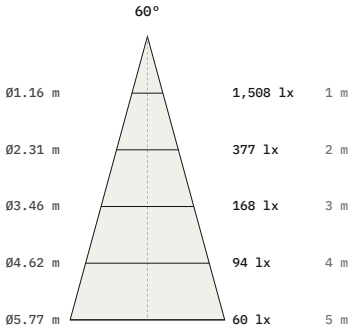

Luminous flux	1,753 lm
Efficacy	117 lm/W
Peak intensity	1,508 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	145 × 65 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.