

Suspended

P3-4314

Pendant




Pendant. 20 W. 15° or 60° beam. 3000, 4000 K. 97 CRI. — LED source: Citizen

Power 20 W	Luminous flux 2000–2100 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 60°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Suspended	Control DALI, 0-10V, Triac, Casambi

Finishes
White, Black, Grey

Dimensions

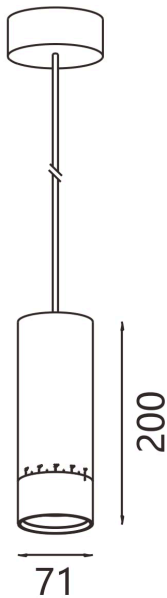

Models

Code	Power	Flux	CRI	Size	Beam
P3-4314	20 W	2000–2100 lm	97 CRI	71 × 200 mm	15° 60°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


20 W

15°		60°	
Ø0.27 m	18,788 lx 1 m	Ø1.07 m	2,914 lx 1 m
Ø0.54 m	4,697 lx 2 m	Ø2.14 m	728 lx 2 m
Ø0.80 m	2,087 lx 3 m	Ø3.21 m	323 lx 3 m
Beam	1 m	2 m	3 m
15°	18,788 lx Ø270 mm	4,697 lx Ø540 mm	2,087 lx Ø800 mm
60°	2,914 lx Ø1070 mm	728 lx Ø2140 mm	323 lx Ø3210 mm

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for P3-4314, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

P3-4314, 20 W, 15° beam

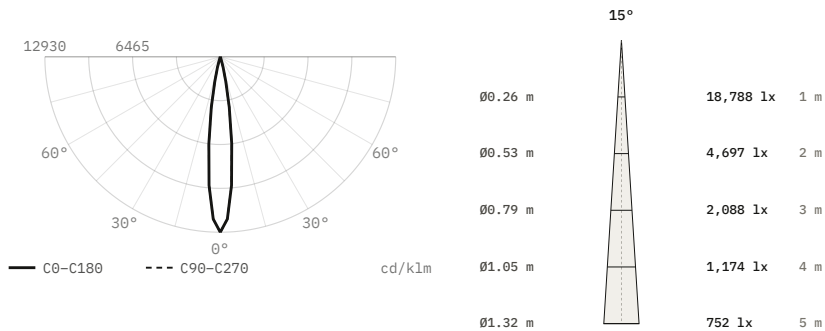

Luminous flux	1,453 lm
Efficacy	73 lm/W
Peak intensity	18,788 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	200 × 71 mm
Data	Calculated from catalogue data

P3-4314, 20 W, 60° beam

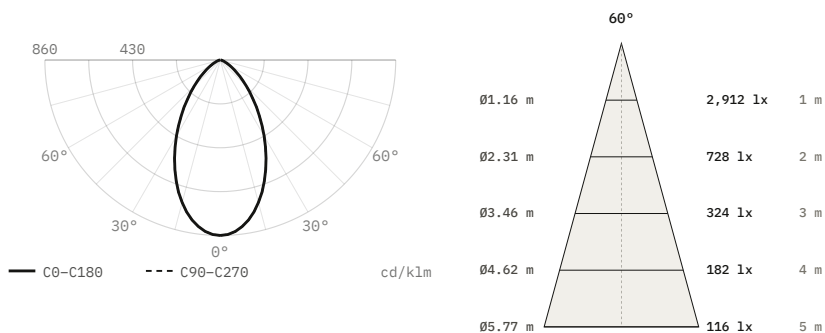

Luminous flux	3,385 lm
Efficacy	169 lm/W
Peak intensity	2,912 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	200 × 71 mm
Data	Calculated from catalogue data