

Linear

PE-Y3-L


Linear luminaire



Linear luminaire. 30 or 40 W. 40° beam. 2700, 4000 K. 97 CRI. — LED source: Citizen

Power	Voltage	Colour temperature
30 W, 40 W	36 V	2700 K, 4000 K
CRI	Beam angles	IP rating
97 CRI	40°	IP20
Mounting	Finishes	
Suspended	Black	

Dimensions

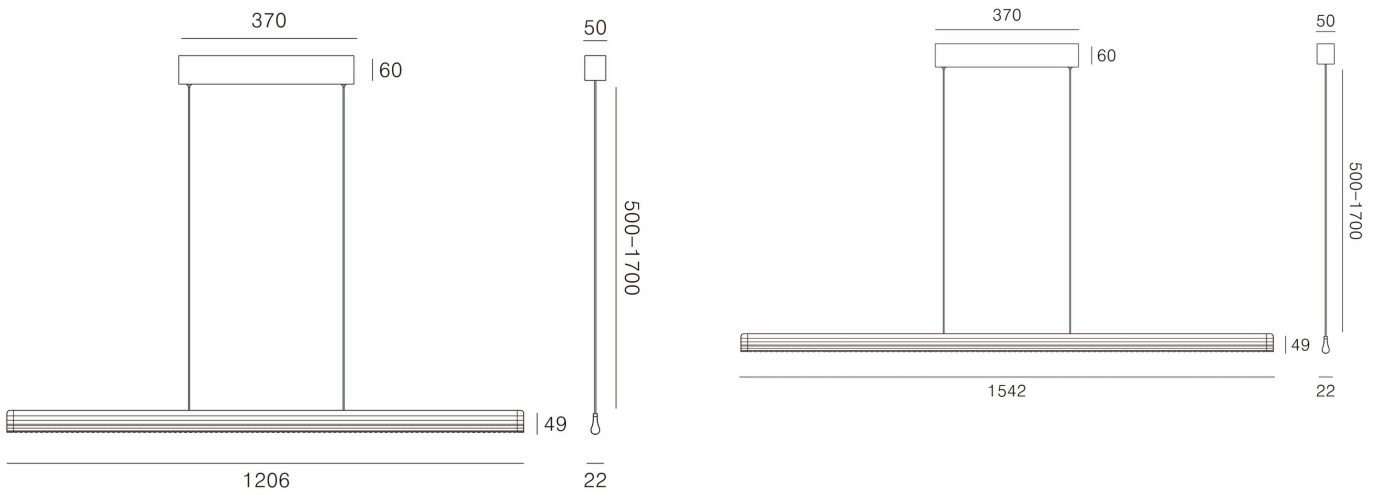


Models

Code	Power	Voltage	CRI	Size	Beam	Notes
PE-Y3-L1200	30 W	36 V	97 CRI	L1206 x W22 x H49 mm	40°	700 mA
PE-Y3-L1600	40 W	36 V	97 CRI	L1542 x W22 x H49 mm	40°	950 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PE-Y3-L1600, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PE-Y3-L1600, 40 W, 40° beam

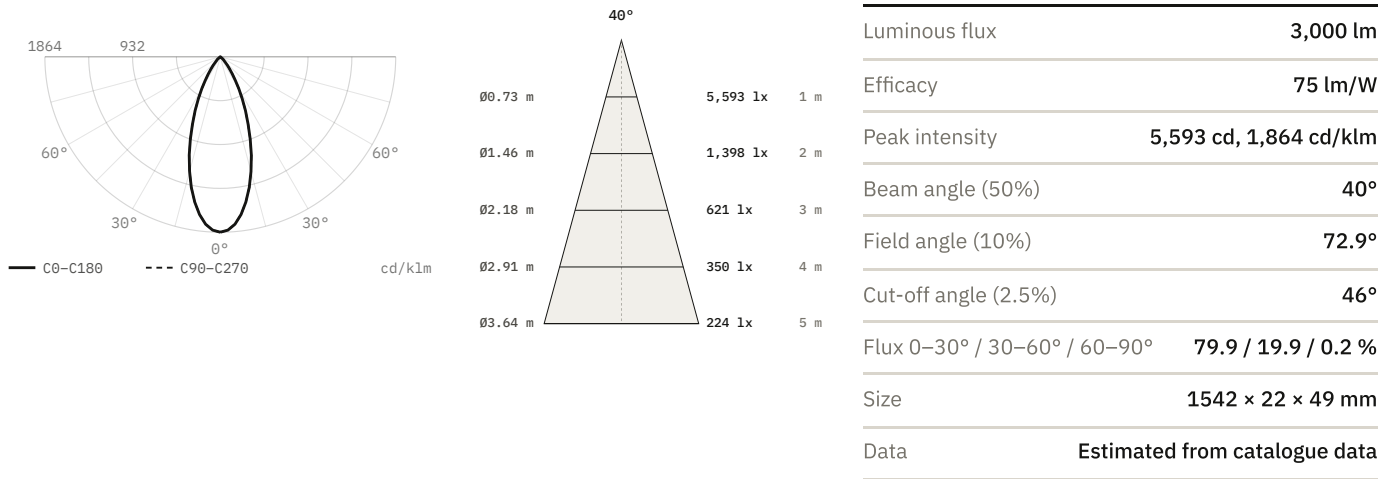

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.