

Suspended

# PE-Y3-R

Pendant




Pendant. 40, 50 or 60 W. 40° beam. 2700, 4000 K.  
97 CRI.

— LED source: Citizen

|                  |             |                    |
|------------------|-------------|--------------------|
| Power            | Voltage     | Colour temperature |
| 40 W, 50 W, 60 W | 36 V        | 2700 K, 4000 K     |
| CRI              | Beam angles | IP rating          |
| 97 CRI           | 40°         | IP20               |
| Mounting         | Finishes    |                    |
| Suspended        | Black       |                    |

Dimensions

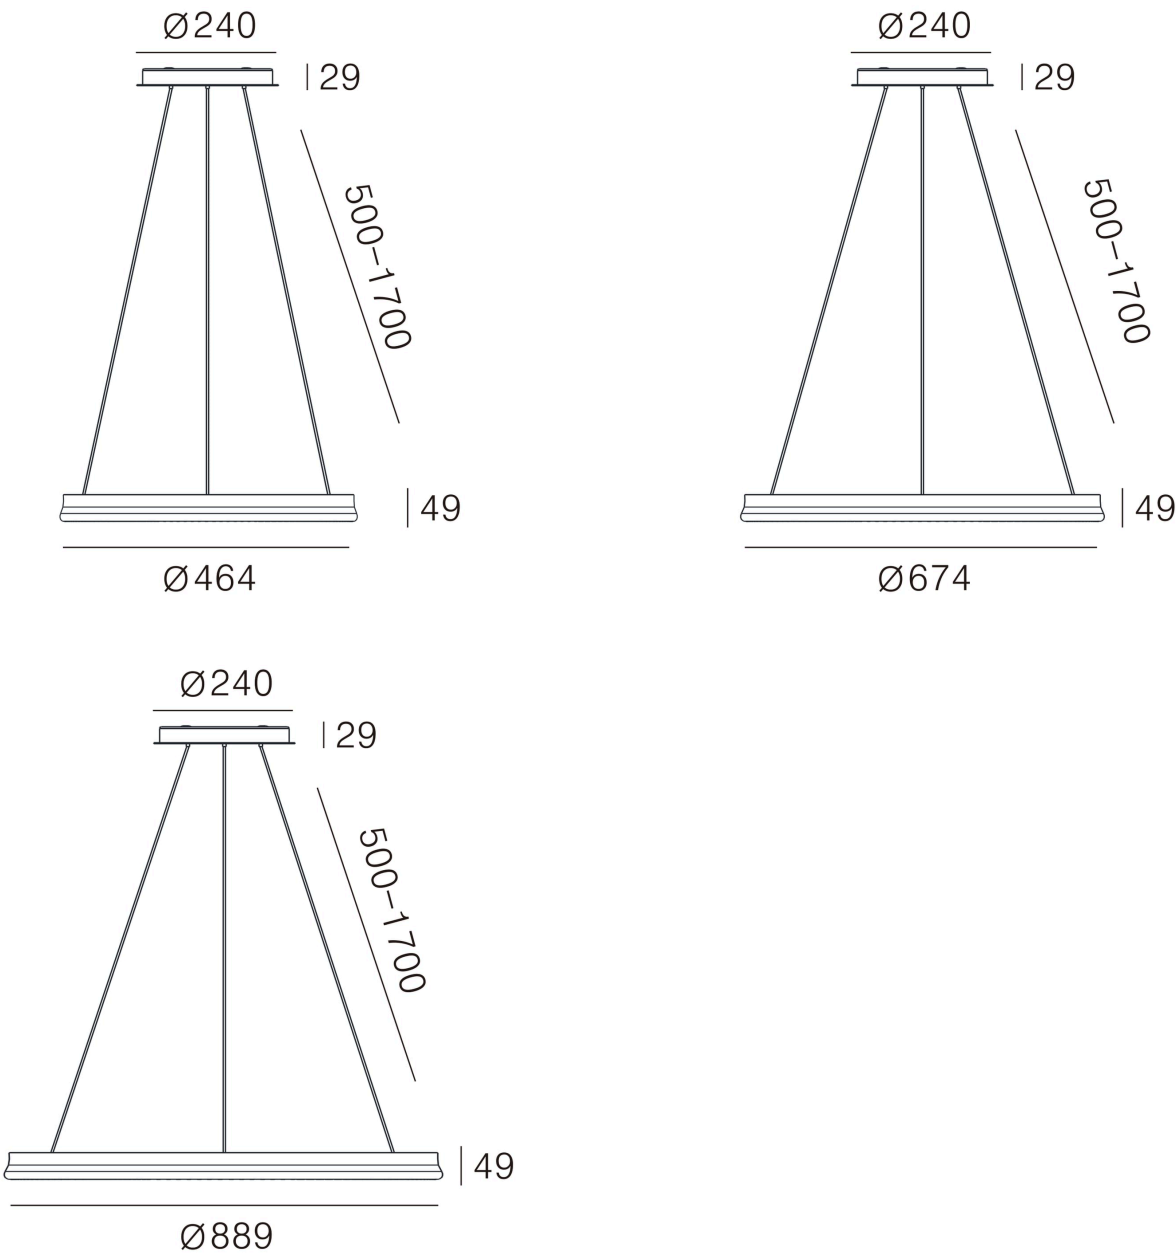

Models

| Code       | Power | Voltage | CRI    | Size          | Beam | Notes   |
|------------|-------|---------|--------|---------------|------|---------|
| PE-Y3-R400 | 40 W  | 36 V    | 97 CRI | Ø464 x H49 mm | 40°  | 950 mA  |
| PE-Y3-R600 | 50 W  | 36 V    | 97 CRI | Ø674 x H49 mm | 40°  | 1200 mA |
| PE-Y3-R800 | 60 W  | 36 V    | 97 CRI | Ø889 x H49 mm | 40°  | 1400 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PE-Y3-R800, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## PE-Y3-R800, 60 W, 40° beam

