

Suspended

PE-Y6-R

Pendant




Pendant. 60, 80 or 100 W. 45° beam. 2700, 4000 K.
97 CRI.

— LED source: Citizen

Power	Voltage	Colour temperature
60 W, 80 W, 100 W	36 V	2700 K, 4000 K
CRI	Beam angles	IP rating
97 CRI	45°	IP20
Mounting	Finishes	
Suspended	Black	

Dimensions

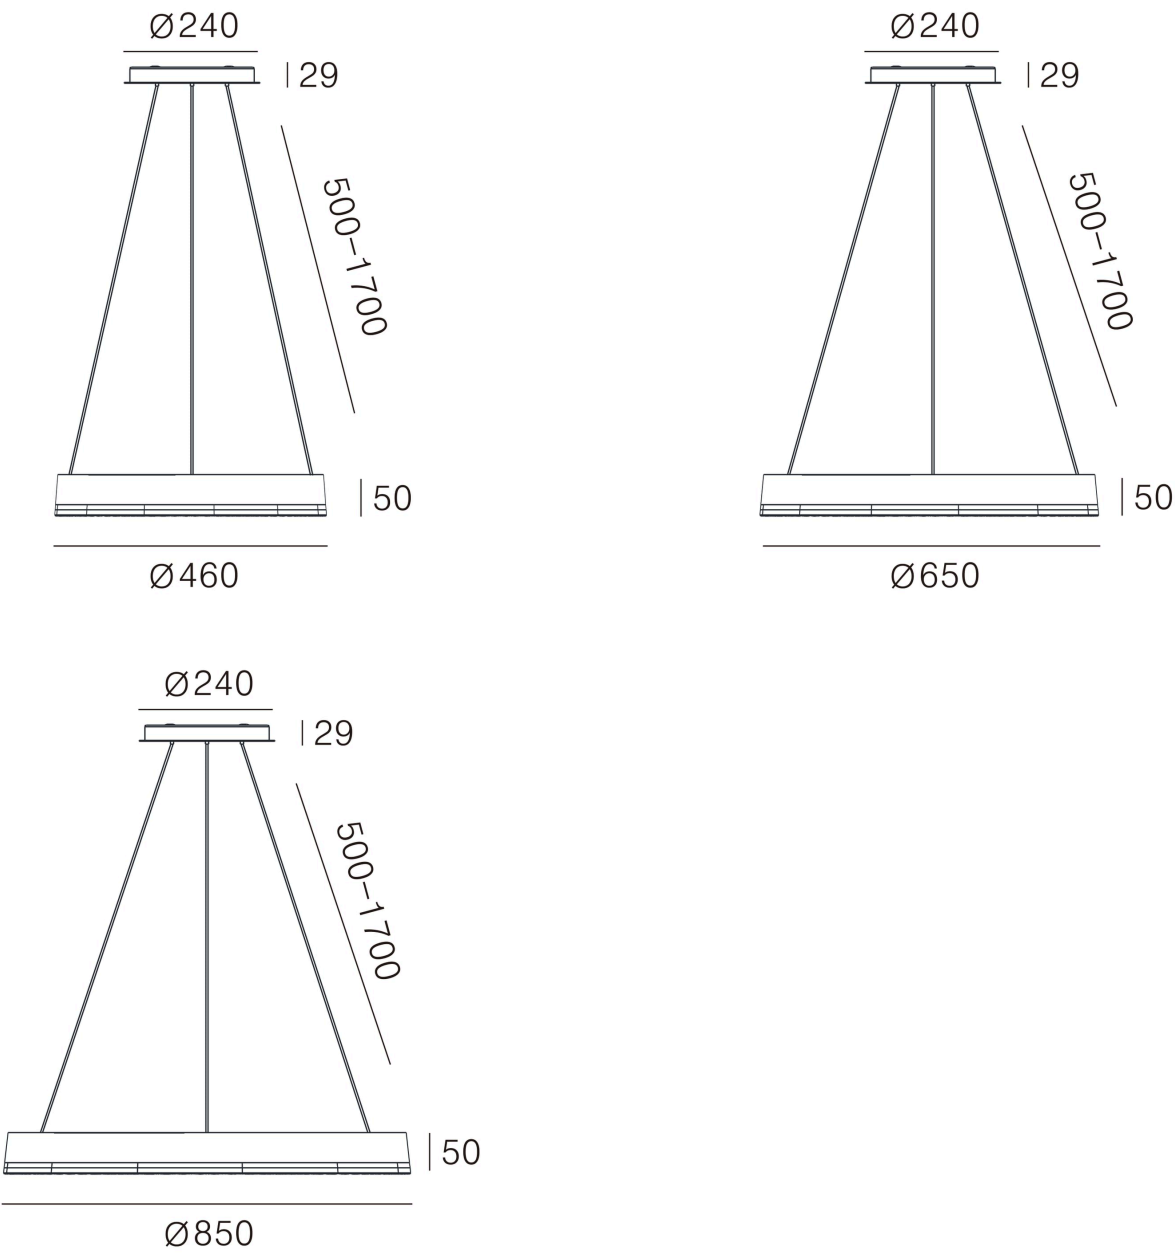

Models

Code	Power	Voltage	CRI	Size	Beam	Notes
PE-Y6-R460	60 W	36 V	97 CRI	Ø460 × 50 mm	45°	700 mA
PE-Y6-R650	80 W	36 V	97 CRI	Ø650 × 50 mm	45°	950 mA
PE-Y6-R850	100 W	36 V	97 CRI	Ø850 × 50 mm	45°	1200 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PE-Y6-R850, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PE-Y6-R850, 100 W, 45° beam

