

Magnetic 23 mm system

Pendant Spotlight CX-9324

23 mm pendant





Pendant for the 23 mm magnetic track. 20 or 28 W.
Beam angles 15° to 36°, by model. 2700, 3000, 3500,
4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power 20 W, 28 W	Voltage 48 V	Luminous flux 2000 lm, 2800 lm
Colour temperature 2700 K, 3000 K, 3500 K, 4000 K	CRI 97 CRI	Beam angles 15°, 20°, 24°, 36°
IP rating IP20	Certifications RoHS, CE	Mounting Suspended, Magnetic track
Control DALI, 0-10V, Bluetooth, Casambi	Finishes White, Black, Grey	

Dimensions

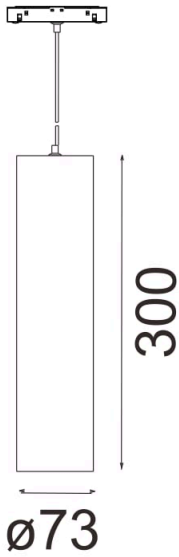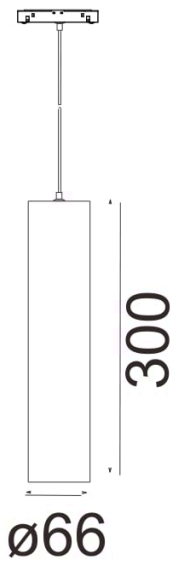


Models

Code	Power	Voltage	Flux	CRI	Size	Beam
CX-9324	20 W	48 V	2000 lm	97 CRI	Ø66 × 300 mm	15° 24° 36°
CX-9325	28 W	48 V	2800 lm	97 CRI	Ø73 × 300 mm	20° 24° 36°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CX-9325, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CX-9325, 28 W, 20° beam

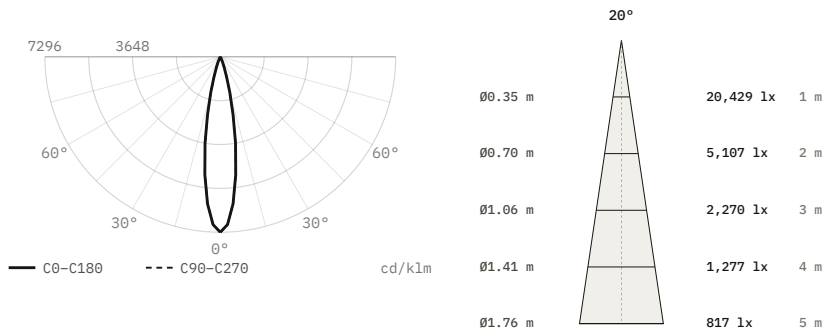


Luminous flux	2,800 lm
Efficacy	100 lm/W
Peak intensity	20,429 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	Ø73 × 300 mm
Data	Calculated from catalogue data

CX-9325, 28 W, 24° beam

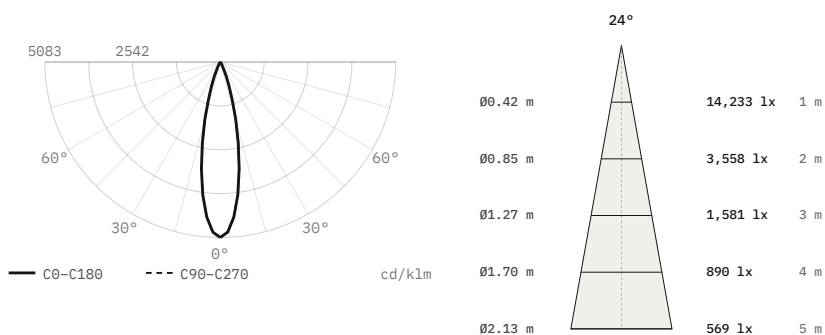

Luminous flux	2,800 lm
Efficacy	100 lm/W
Peak intensity	14,233 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø73 × 300 mm
Data	Calculated from catalogue data

CX-9325, 28 W, 36° beam

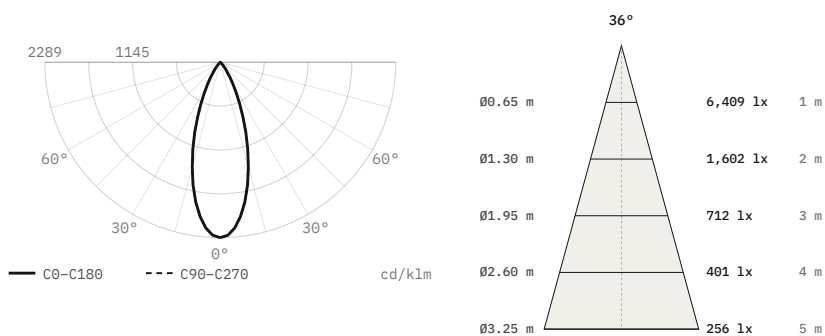

Luminous flux	2,800 lm
Efficacy	100 lm/W
Peak intensity	6,409 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø73 × 300 mm
Data	Calculated from catalogue data

