

Magnetic 23 mm system

Pendant Spotlight CX-9321

23 mm pendant



Pendant for the 23 mm magnetic track. 10 W. 20° or 30° beam. 2700, 3000, 3500, 4000 K. 97 CRI.

- LED source: Citizen
- UGR <19

Power 10 W	Voltage 48 V	Luminous flux 1000 lm
Colour temperature 2700 K, 3000 K, 3500 K, 4000 K	CRI 97 CRI	Beam angles 20°, 30°
IP rating IP20	Certifications RoHS, CE	Mounting Suspended, Magnetic track
Control DALI, 0-10V, Bluetooth, Casambi	Finishes White, Black, Grey	

Dimensions




Models

Code	Power	Voltage	Flux	CRI	Size	Beam
CX-9321	10 W	48 V	1000 lm	97 CRI	Ø40 × 400 mm	20° 30°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CX-9321, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CX-9321, 10 W, 20° beam

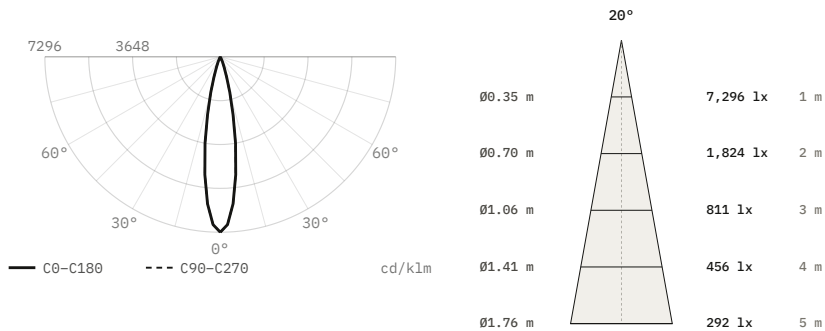

Luminous flux	1,000 lm
Efficacy	100 lm/W
Peak intensity	7,296 cd, 7,296 cd/klm
Beam angle (50%)	20°
Field angle (10%)	36.5°
Cut-off angle (2.5%)	23°
Flux 0–30° / 30–60° / 60–90°	99.8 / 0.2 / 0 %
Size	Ø40 × 400 mm
Data	Calculated from catalogue data

CX-9321, 10 W, 30° beam

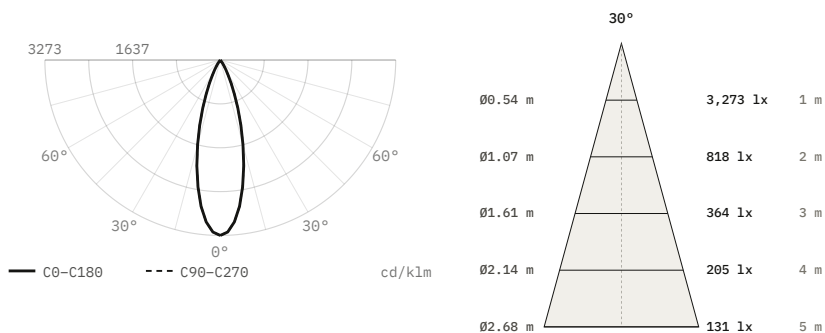

Luminous flux	1,000 lm
Efficacy	100 lm/W
Peak intensity	3,273 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	Ø40 × 400 mm
Data	Calculated from catalogue data