

Suspended

Pro PH0073

Pendant




Pendant. 37 W. 50° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø76 mm
- LED source: Citizen

Power 37 W	Voltage max 36 V	Luminous flux 2160 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 50°
IP rating IP20	Certifications CE	Mounting Suspended
Finishes White		

Dimensions

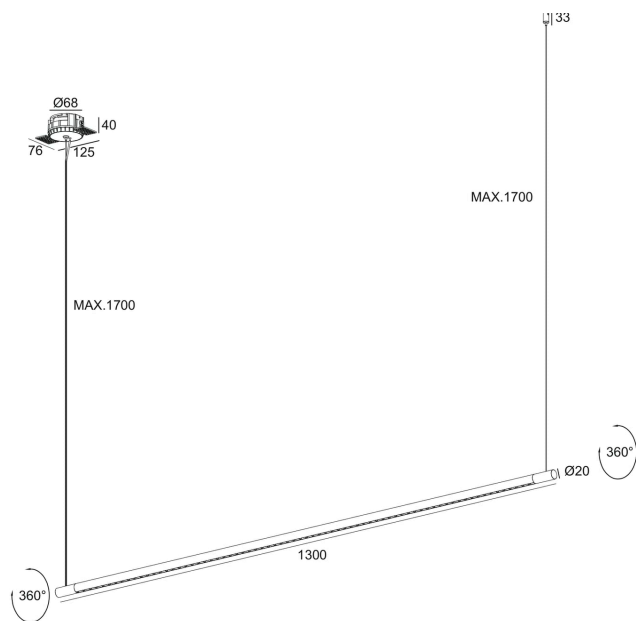


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
PH0073	1300 mm	37 W	max 36 V	2160 lm	97 CRI	L1300 × Ø20 mm; suspension MAX.1700 mm	Ø76 mm	50°	900 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0073, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PH0073, 37 W, 50° beam

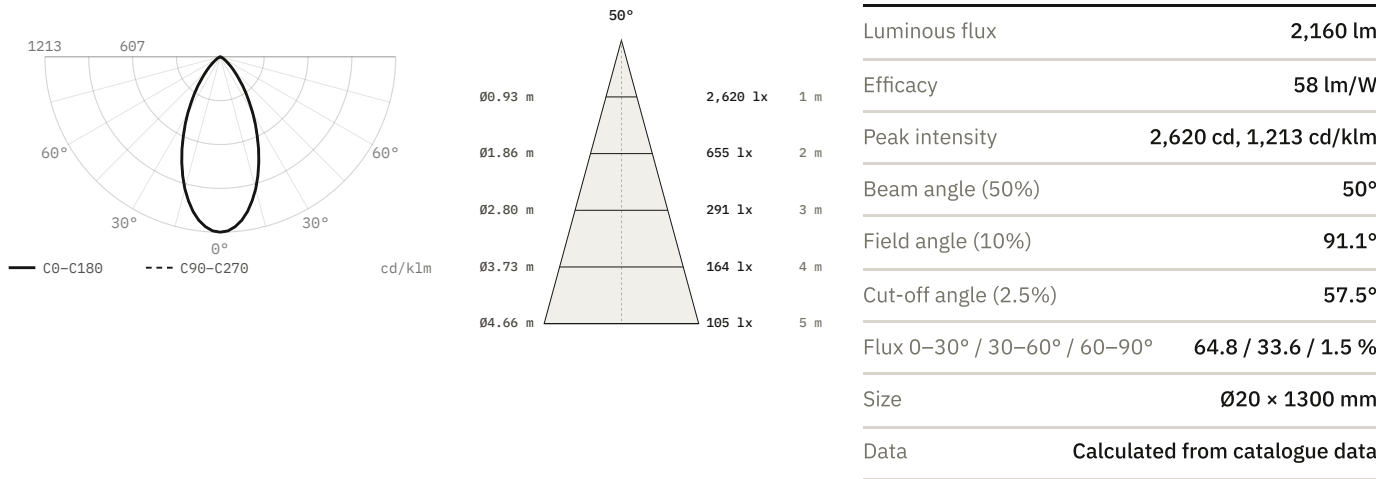

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.