


Suspended

Pro PH0075

Pendant

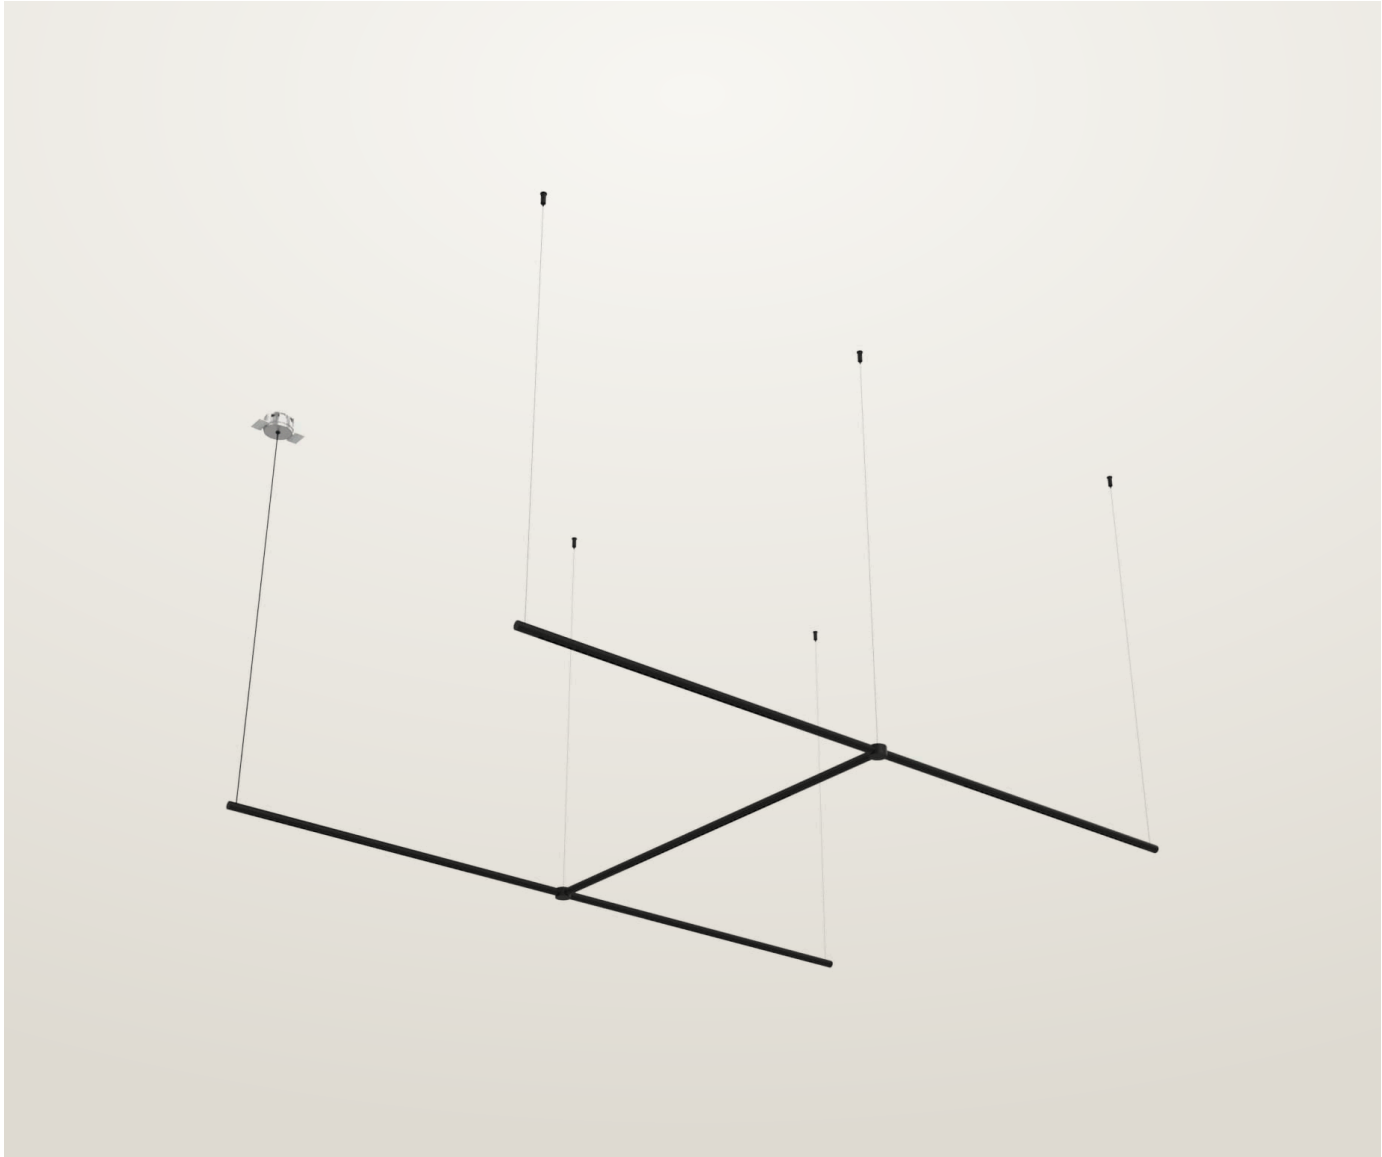

Pendant.


- Ceiling cut-out Ø78 mm
- LED source: Citizen

Voltage 48 V DC	Luminous flux 6500 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 50°	IP rating IP20
Certifications CE	Mounting Suspended	Finishes Black

Models

Code	Version	Voltage	Flux	CRI	Size	Cut-out	Beam
PH0075	1515 × 835 mm	48 V DC	6500 lm	97 CRI	1515 × 835 mm (Ø20 bars); suspension MAX.1700 mm	Ø78 mm	50°

Finishes



Black



White

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for PH0075, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

PH0075, 50° beam

