

Recessed

R3-1030

Recessed spotlight



Recessed spotlight. 28 or 32 W. 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø165 mm
- LED source: Citizen

Power
28 W, 32 W

Voltage
220–240 V AC

Luminous flux
2600–2700 lm, 2900–3000 lm

Colour temperature
3000 K, 4000 K

CRI
97 CRI

IP rating
IP20


Certifications
CE, RoHS, EMC, LVD

Mounting
Recessed

Control
On/Off, DALI, 0-10V, Triac, Casambi

Finishes
White, Black, Grey

Dimensions

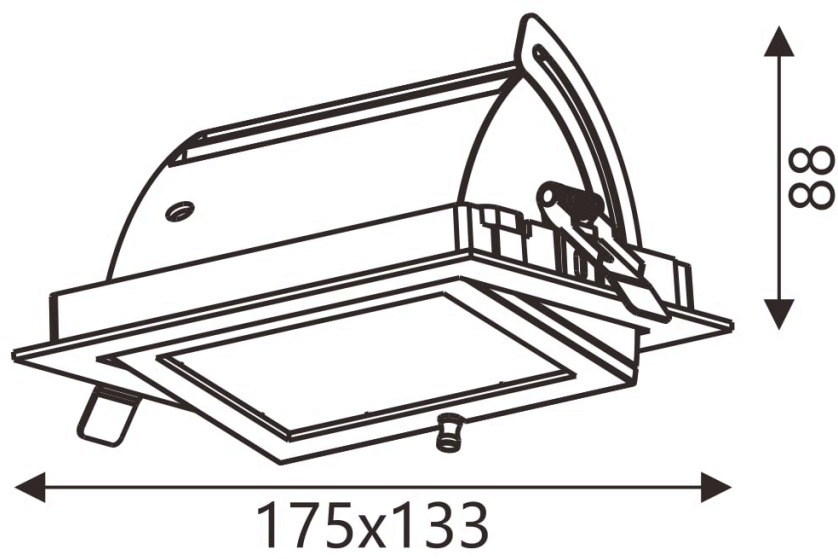


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out
R3-1030	90° × 60°	28 W	220–240 V AC	2600–2700 lm	97 CRI	175 × 133 x H88 mm	Ø165 mm
R3-1030	90° × 60°	32 W	220–240 V AC	2900–3000 lm	97 CRI	175 × 133 x H88 mm	Ø165 mm

Finishes



Black



White




Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for R3-1030, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

R3-1030, 32 W, wide distribution

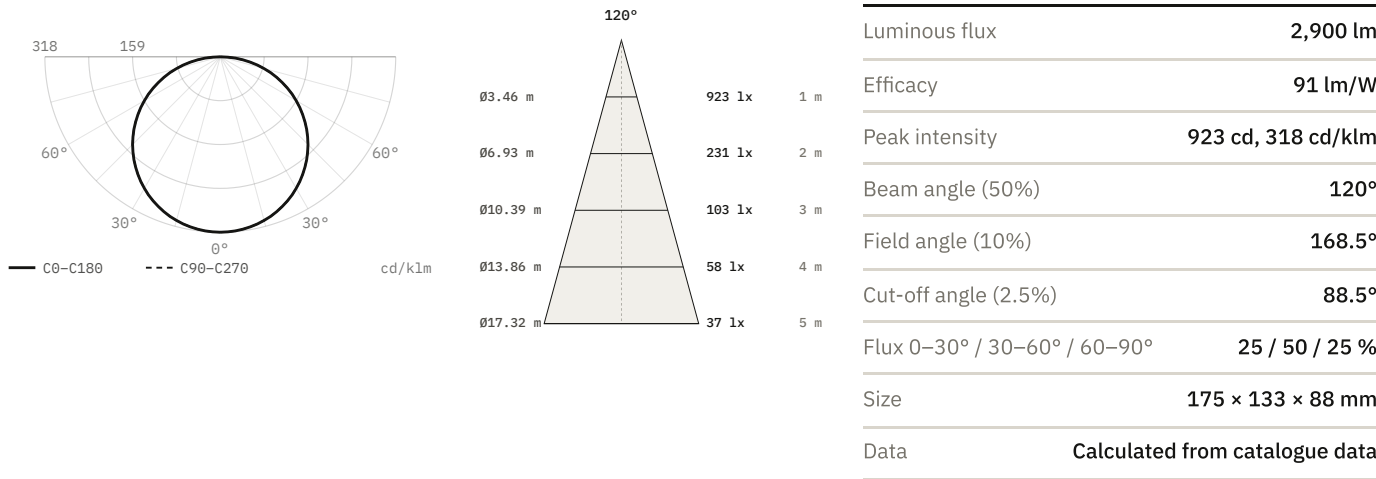

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.