

Recessed

R3-1030G

Recessed spotlight




Recessed spotlight. 28 or 32 W. 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø165 mm
- LED source: Citizen

Power	Voltage	Luminous flux
28 W, 32 W	220–240 V AC	3300–3400 lm, 3800–3900 lm
Colour temperature	CRI	IP rating
3000 K, 4000 K	97 CRI	IP20
Certifications	Mounting	Control
CE, RoHS, EMC, LVD	Recessed	On/Off, DALI, 0-10V, Triac, Casambi
Finishes		
White, Black, Grey		

Dimensions

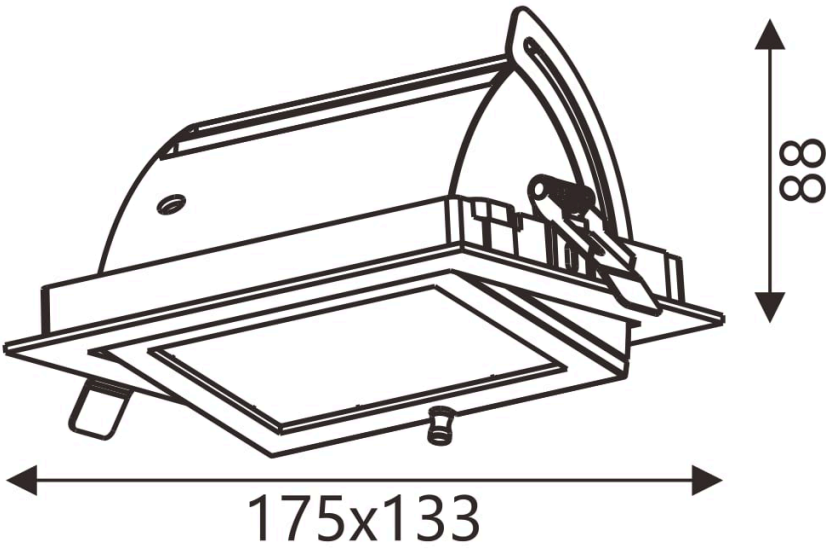

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out
R3-1030G	90° × 60°	28 W	220–240 V AC	3300–3400 lm	97 CRI	175 × 133 x H88 mm	Ø165 mm
R3-1030G	90° × 60°	32 W	220–240 V AC	3800–3900 lm	97 CRI	175 × 133 x H88 mm	Ø165 mm

Finishes



Black



White




Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for R3-1030G, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

R3-1030G, 32 W, wide distribution

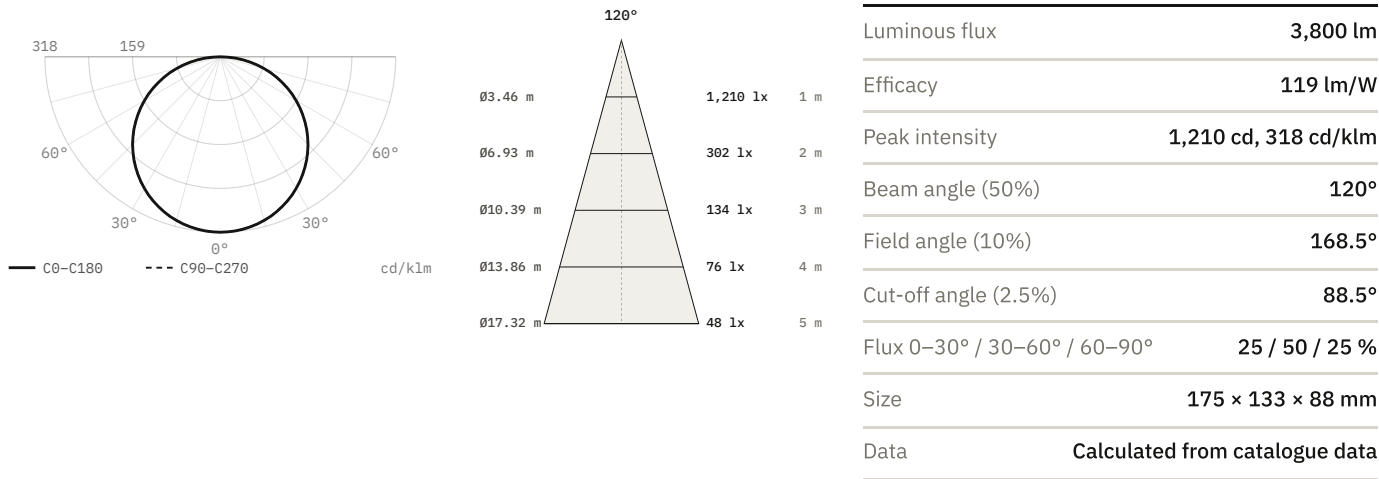

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.