

Recessed

R3-1031G

Recessed spotlight




Recessed spotlight. 35 or 43 W. 3000, 4000 K. 97 CRI.

— Ceiling cut-out Ø210 mm

— LED source: Citizen

Power	Voltage	Luminous flux
35 W, 43 W	220–240 V AC	3600–3700 lm, 4400–4500 lm
Colour temperature	CRI	IP rating
3000 K, 4000 K	97 CRI	IP20
Certifications	Mounting	Control
CE, RoHS, EMC, LVD	Recessed	On/Off, DALI, 0-10V, Triac, Casambi
Finishes		
White, Black, Grey		

Dimensions

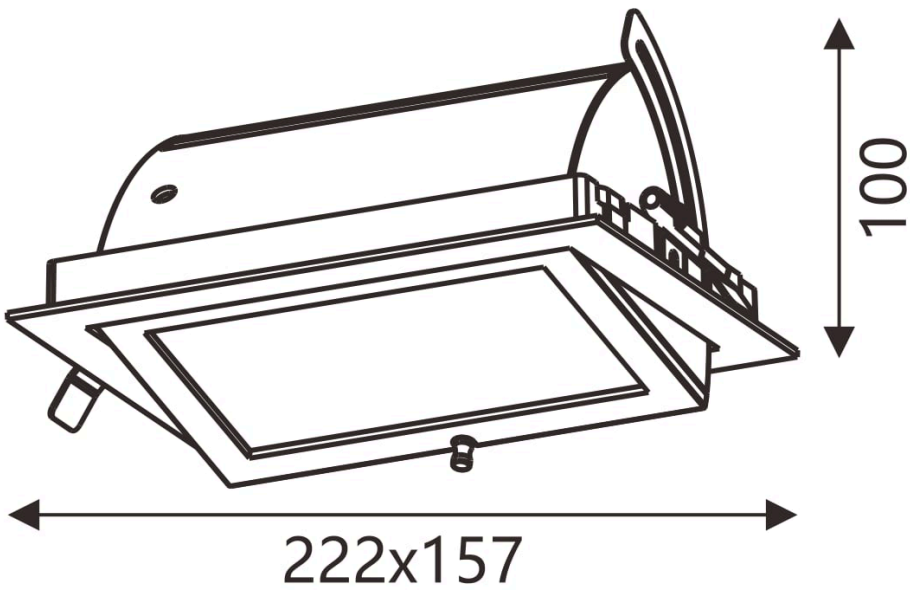

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out
R3-1031G	90° × 70°	35 W	220–240 V AC	3600–3700 lm	97 CRI	222 × 157 × H100 mm	Ø210 mm
R3-1031G	90° × 70°	43 W	220–240 V AC	4400–4500 lm	97 CRI	222 × 157 × H100 mm	Ø210 mm

Finishes



Black



White




Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for R3-1031G, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

R3-1031G, 43 W, wide distribution

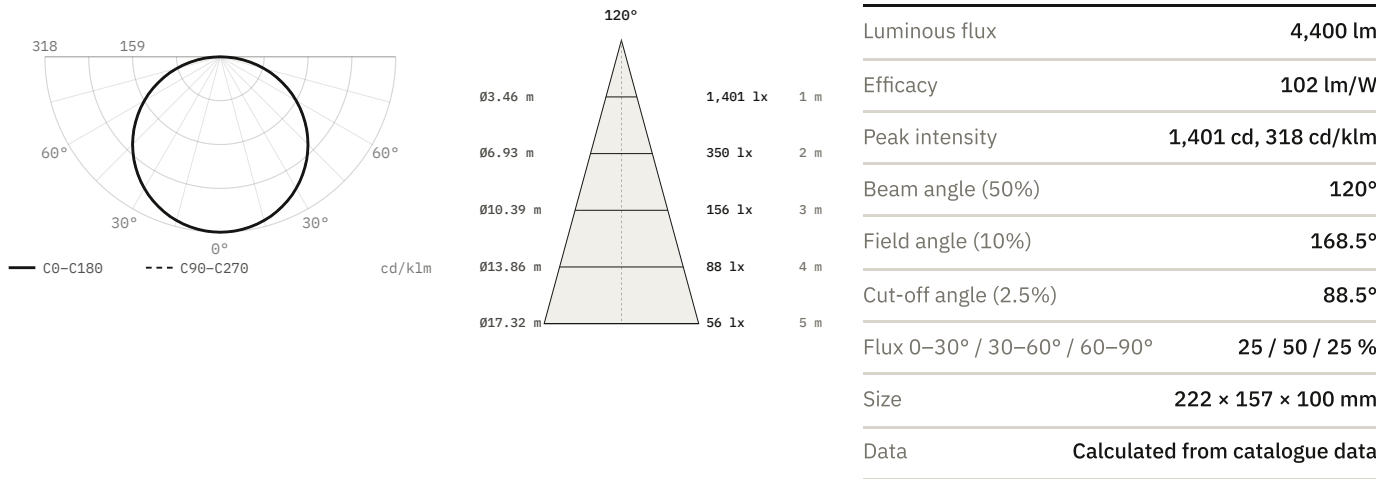

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.