

Recessed

R3-4223

Recessed spotlight




Recessed spotlight. 20 W. 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø70 mm
- LED source: Citizen

Power 20 W	Voltage 220–240 V AC	Luminous flux 1600 lm
Colour temperature 3000 K, 4000 K	CRI 97 CRI	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Recessed	Control On/Off, DALI, 0-10V, Triac, Casambi
Finishes White, Black, Grey		

Dimensions

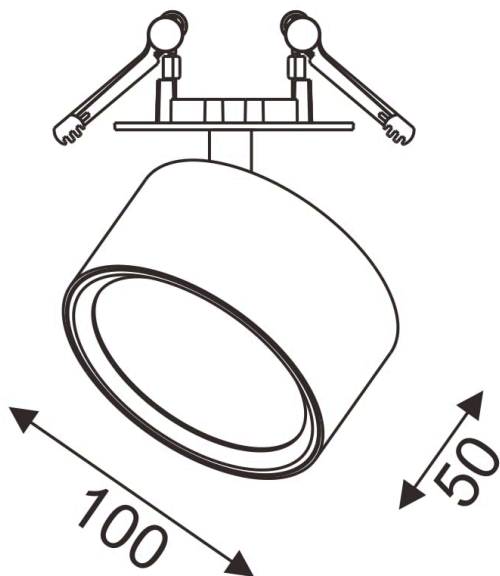

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out
R3-4223	Floodlight	20 W	220–240 V AC	1600 lm	97 CRI	Head 100 × 50 mm	Ø70 mm

Finishes



Black



White



Grey

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for R3-4223, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

R3-4223, 20 W, wide distribution

