Downlights

# M22 1206

Recessed spotlight




Recessed spotlight. 6 W. 110° beam. 2700, 3000, 4000, 5000 K. IP44. 97 CRI.

- Ceiling cut-out Ø104 mm
- LED source: Citizen

| Power | Voltage | Colour temperature |
|---|---|---|
| 6 W | 36 V | 2700 K, 3000 K, 4000 K, 5000 K |
| **CRI** | **Beam angles** | **IP rating** |
| 97 CRI | 110° | IP44 |
| **Mounting** | **Control** | **Finishes** |
| Recessed | On/Off | White, Black, Silver, Brass, Bronze |

## Dimensions

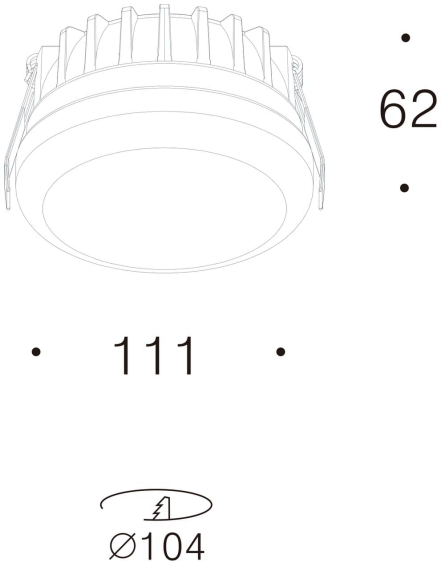



## Models


| Code | Power | Voltage | CRI | Size | Cut-out | Beam | Notes |
|---|---|---|---|---|---|---|---|
| **RE-M22-1206** | 6 W | 36 V | 97 CRI | Ø111 × 62 mm | Ø104 mm | 110° | 150 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for RE-M22-1206, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## RE-M22-1206, 6 W, 110° beam

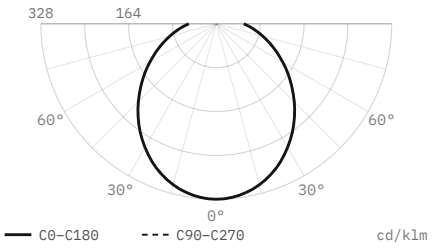

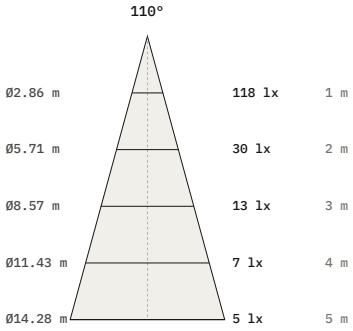
| | |
|---|---|
| Luminous flux | **360 lm** |
| Efficacy | **60 lm/W** |
| Peak intensity | **118 cd, 328 cd/klm** |
| Beam angle (50%) | **110°** |
| Cut-off angle (2.5%) | **90°** |
| Flux 0–30° / 30–60° / 60–90° | **25 / 46.2 / 28.8 %** |
| Size | **Ø111 × 62 mm** |
| Data | **Estimated from catalogue data** |

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.