Downlights

M25 1501

Recessed spotlight




Recessed spotlight. 15 W. Beam angles 24° to 45°, by model. 2700, 3000, 4000 K. IP44. 97 CRI.

- Ceiling cut-out Ø55 mm
- LED source: Citizen
- UGR <10 (24°), <13 (36°), <17 (45°)

Power **15 W**	Voltage **220–240 V AC**	Luminous flux **1341 lm, 1357 lm, 1231 lm**
Colour temperature **2700 K, 3000 K, 4000 K**	CRI **97 CRI**	Beam angles **24°, 36°, 45°**
IP rating **IP44**	Mounting **Recessed**	Control **On/Off**
Finishes **White, Black, Silver, Brass, Bronze**		

Dimensions

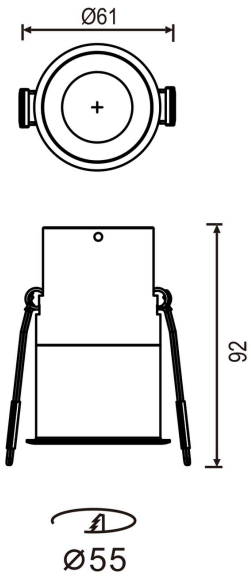

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
RE-M25-1501	24°	15 W	220–240 V AC	1341 lm	97 CRI	Ø61 × 92 mm	Ø55 mm	24°	350 mA
RE-M25-1501	36°	15 W	220–240 V AC	1357 lm	97 CRI	Ø61 × 92 mm	Ø55 mm	36°	350 mA
RE-M25-1501	45°	15 W	220–240 V AC	1231 lm	97 CRI	Ø61 × 92 mm	Ø55 mm	45°	350 mA

Finishes


Brass


Bronze


Black



White



Silver

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for RE-M25-1501, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.


RE-M25-1501, 15 W, 24° beam

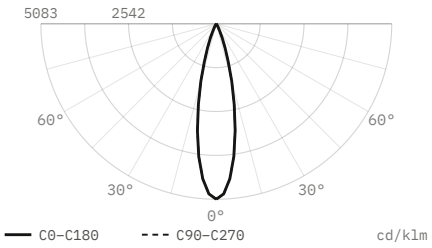


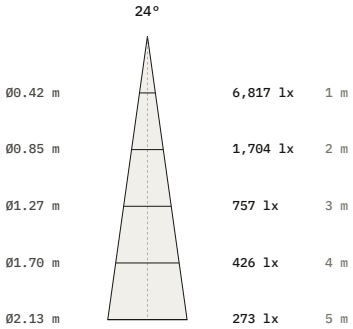

Luminous flux	1,341 lm
Efficacy	89 lm/W
Peak intensity	6,817 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø61 × 92 mm
Data	Calculated from catalogue data


RE-M25-1501, 15 W, 36° beam

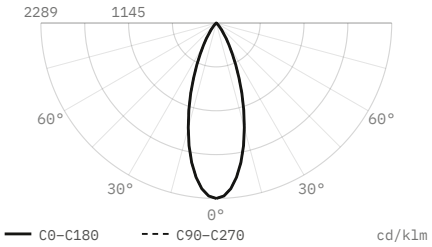


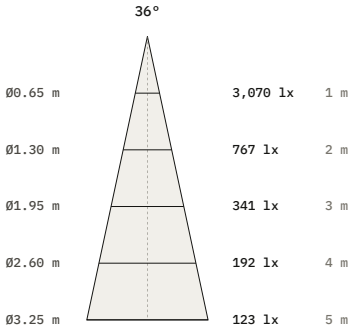

Luminous flux	1,341 lm
Efficacy	89 lm/W
Peak intensity	3,070 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø61 × 92 mm
Data	Calculated from catalogue data

RE-M25-1501, 15 W, 45° beam

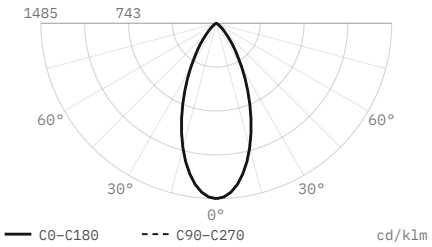

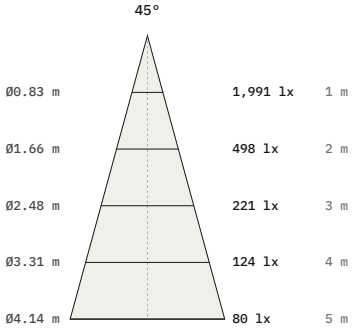

Luminous flux	1,341 lm
Efficacy	89 lm/W
Peak intensity	1,991 cd, 1,485 cd/klm
Beam angle (50%)	45°
Field angle (10%)	82°
Cut-off angle (2.5%)	51.5°
Flux 0–30° / 30–60° / 60–90°	72.2 / 27.2 / 0.6 %
Size	Ø61 × 92 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.