

Surface

Robo CH0261

Surface luminaire




Surface luminaire. 18 W. 55° beam. 2700, 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 18 W	Voltage max 37 V	Luminous flux 1440 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 55°
IP rating IP20	Certifications CE	Mounting Surface
Finishes Black		

Dimensions

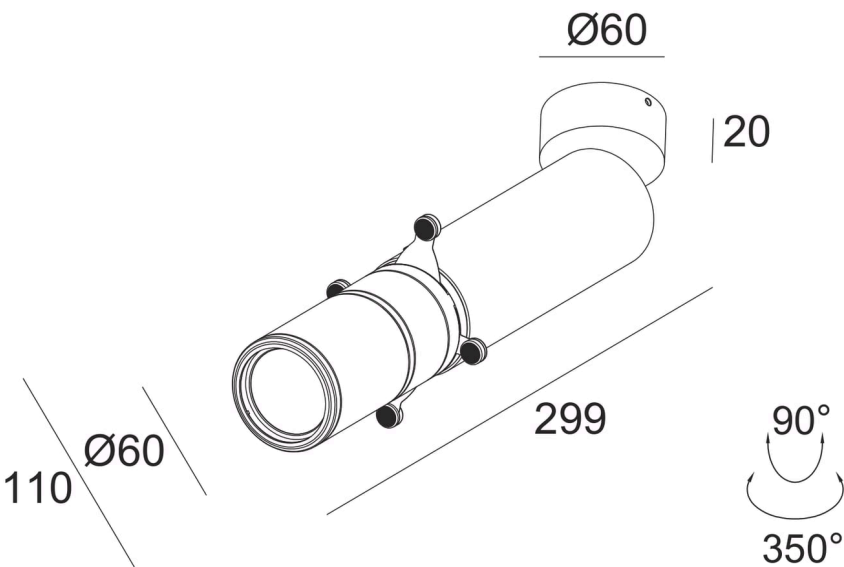

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Beam	Notes
CH0261	15-36°	18 W	max 37 V	1440 lm	97 CRI	Canopy $\varnothing 60 \times 20$ mm; body $\varnothing 60 \times 299$ mm; ring $\varnothing 110$ mm	55°	500 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for CH0261, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

CH0261, 18 W, 55° beam

