

Recessed

Robo DL0165

Recessed spotlight



Recessed spotlight. 7 W. 35° or 50° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø95 mm
- LED source: Citizen

Power 7 W	Voltage max 19 V	Luminous flux 595 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 35°, 50°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes White		


Models

Code	Power	Voltage	Flux	CRI	Cut-out	Beam	Notes
DL0165	7 W	max 19 V	595 lm	97 CRI	Ø95 mm	35° 50°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0165, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0165, 7 W, 35° beam

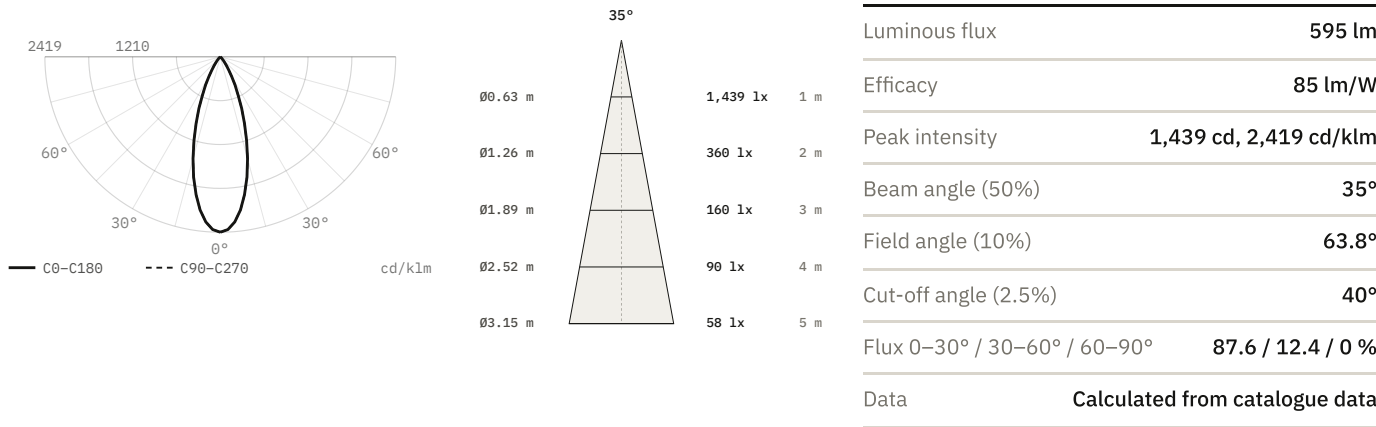

DL0165, 7 W, 50° beam

