

Recessed

Robo DL1440

Recessed spotlight




Recessed spotlight. 7 W. 10° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø35 mm
- LED source: Citizen

Power 7 W	Voltage max 12 V	Luminous flux 100 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 10°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes White		

Dimensions

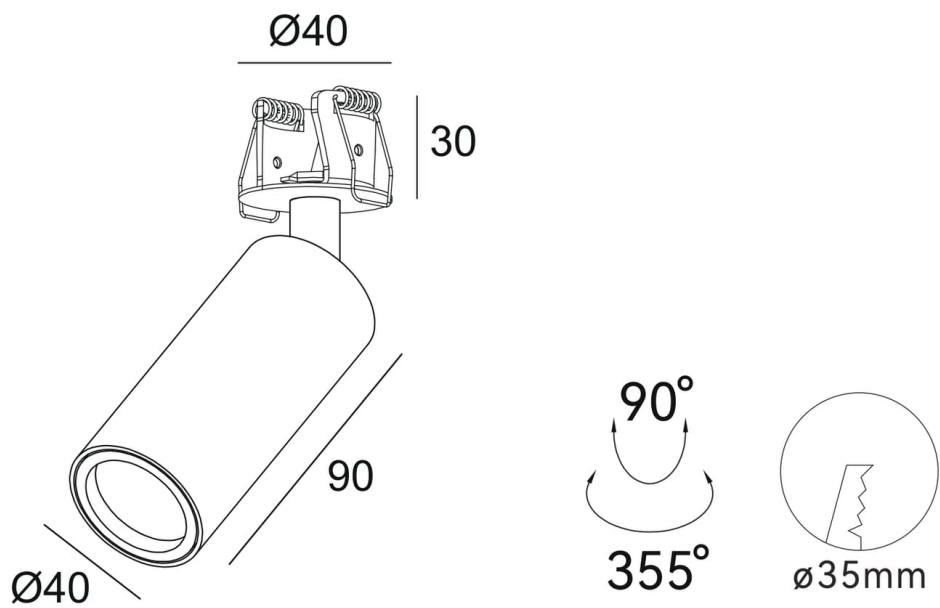

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1440	7 W	max 12 V	100 lm	97 CRI	$\varnothing 40 \times H30$ mm above ceiling; head $\varnothing 40 \times L90$ mm	$\varnothing 35$ mm	10°	600 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1440, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1440, 7 W, 10° beam

