

Recessed

Robo DL1457

Recessed spotlight




Recessed spotlight. 13 W. 75° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø45 mm
- LED source: Citizen

Power 13 W	Voltage max 37 V	Luminous flux 1180 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 75°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

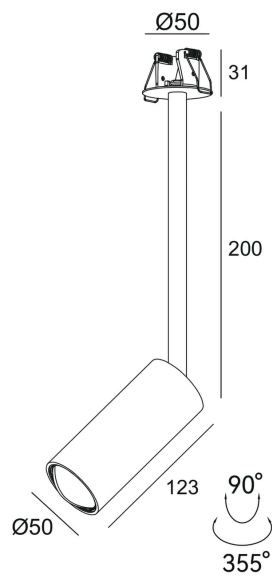

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1457	200 mm stem	13 W	max 37 V	1180 lm	97 CRI	Recessed body Ø50 × 31 mm; stem 200 mm; head Ø50 × 123 mm	Ø45 mm	75°	350 mA
DL1459	400 mm stem	13 W	max 37 V	1180 lm	97 CRI	Recessed body Ø50 × 31 mm; stem 400 mm; head Ø50 × 123 mm	Ø45 mm	75°	350 mA
DL1461	400 mm stem	13 W	max 37 V	1180 lm	97 CRI	Recessed body Ø50 × 31 mm; stem 400 mm; head Ø50 × 123 mm	Ø45 mm	75°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1457, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1457, 13 W, 75° beam

