

Recessed

Robo DL1559

Recessed spotlight




Recessed spotlight. 10 W. Four beam angles, 15° to 60°. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø108 mm
- LED source: Citizen

Power 10 W	Voltage 2 × max 19 V	Luminous flux 2 × 450 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 15°, 24°, 38°, 60°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes White		

Dimensions

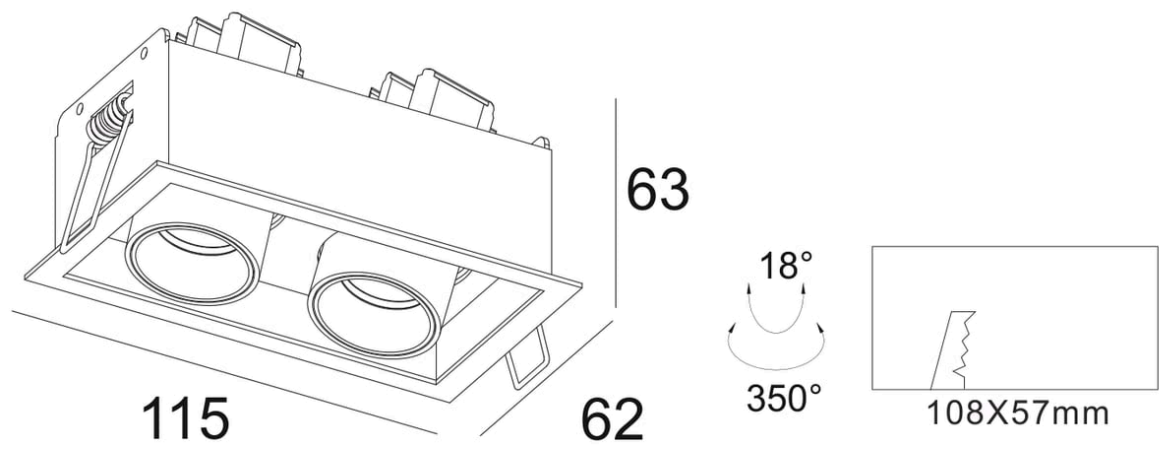


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1559	2 heads	10 W	2 × max 19 V	2 × 450 lm	97 CRI	115 × 62 × H63 mm	Ø108 mm	15° 24° 38° 60°	250 mA; Power per head

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1559, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1559, 10 W, 15° beam

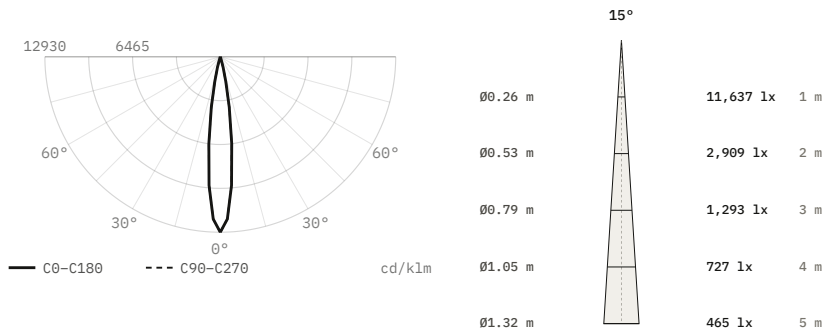


Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	11,637 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	115 × 62 × 63 mm
Data	Calculated from catalogue data

DL1559, 10 W, 24° beam

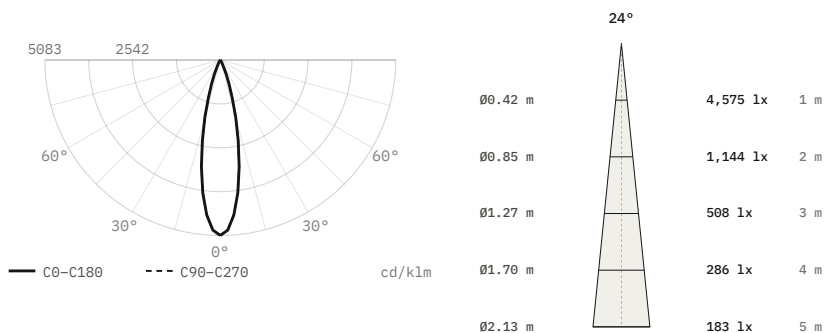


Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	4,575 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	115 × 62 × 63 mm
Data	Calculated from catalogue data

DL1559, 10 W, 38° beam

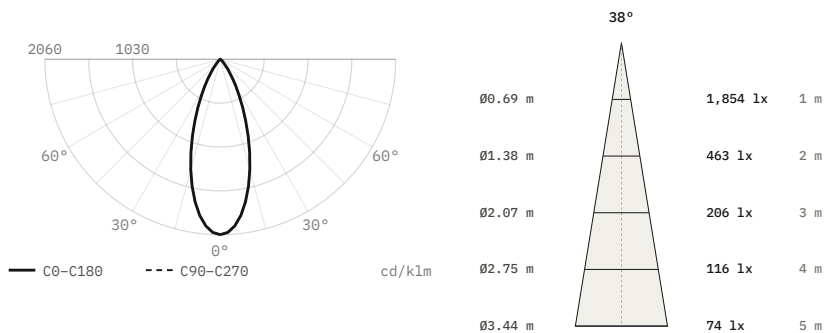

Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	1,854 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	115 × 62 × 63 mm
Data	Calculated from catalogue data

DL1559, 10 W, 60° beam

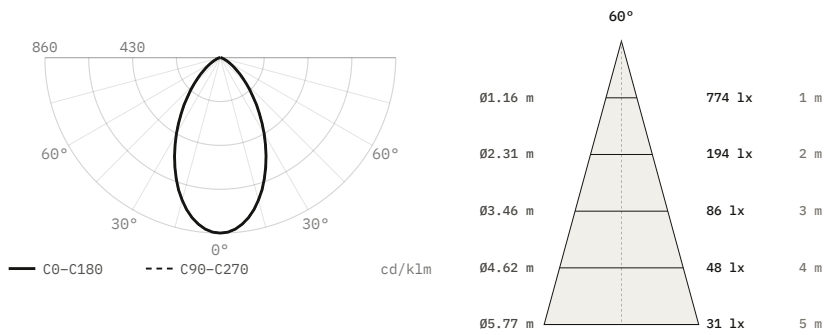

Luminous flux	900 lm
Efficacy	90 lm/W
Peak intensity	774 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	115 × 62 × 63 mm
Data	Calculated from catalogue data