

Recessed

Robo DL1591

Recessed spotlight




Recessed spotlight. 7 W. 75° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø68 mm
- LED source: Citizen

Power 7 W	Voltage max 37 V	Luminous flux 630 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 75°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes White		

Dimensions

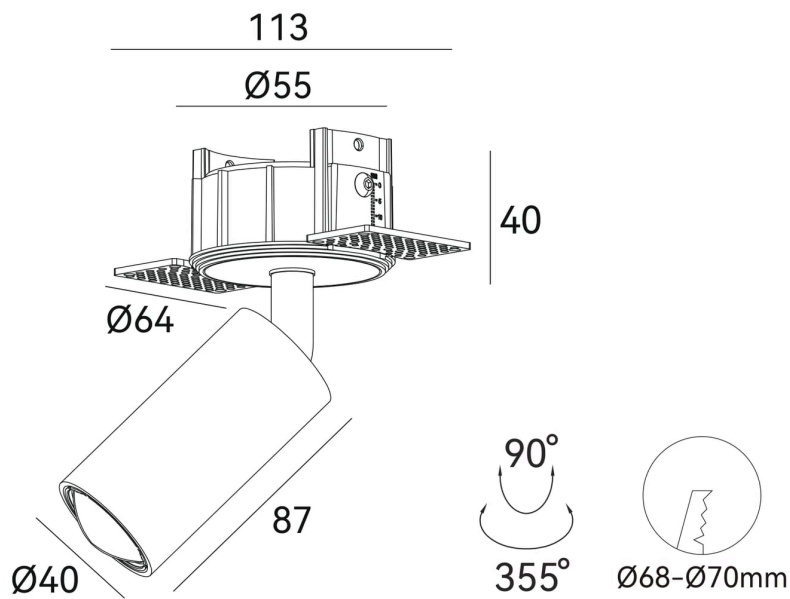

Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1591	7 W	max 37 V	630 lm	97 CRI	Trimless frame 113 / Ø55 / Ø64, H40 mm; head Ø40 x L87 mm	Ø68 mm	75°	180 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1591, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1591, 7 W, 75° beam

