

Recessed

Robo DL1801

Recessed spotlight




Recessed spotlight. 7 W. 55° beam. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø68 mm
- LED source: Citizen

Power 7 W	Voltage max 20 V	Luminous flux 560 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	Beam angles 55°
IP rating IP20	Certifications CE	Mounting Recessed
Finishes Black		

Dimensions

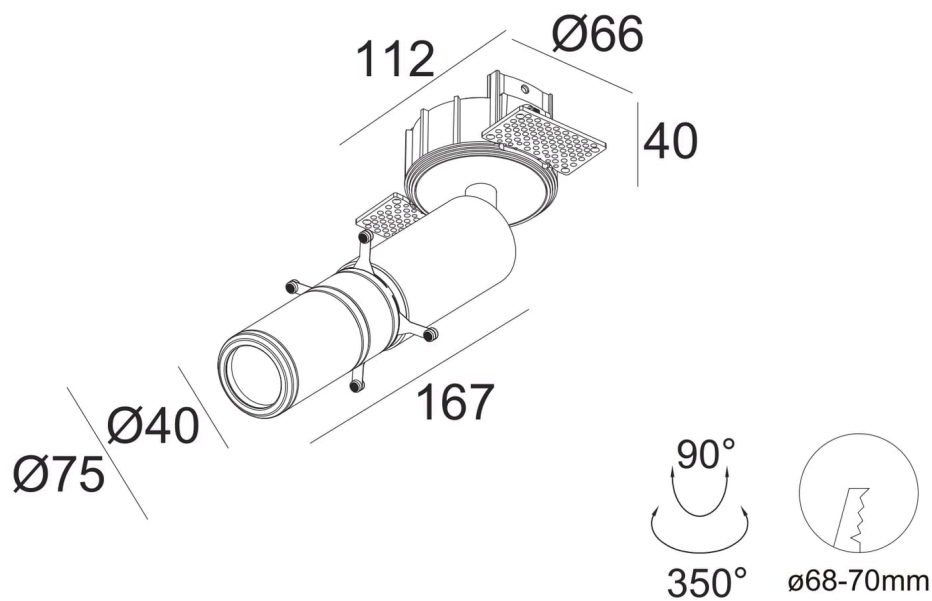

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL1801	15–36°	7 W	max 20 V	560 lm	97 CRI	Housing Ø66, plaster flange 112, height 40, body Ø40 × 167, ring Ø75 mm	Ø68 mm	55°	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1801, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1801, 7 W, 55° beam

