

Recessed

Robo DL1892

Recessed spotlight



Recessed spotlight. 18 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø68 mm
- LED source: Citizen

Power
18 W

Voltage
max 36 V

Luminous flux
1040 lm

Colour temperature
2700 K, 3000 K, 4000 K

CRI
97 CRI


IP rating
IP20

Certifications
CE

Mounting
Recessed

Finishes
White, Black

Dimensions

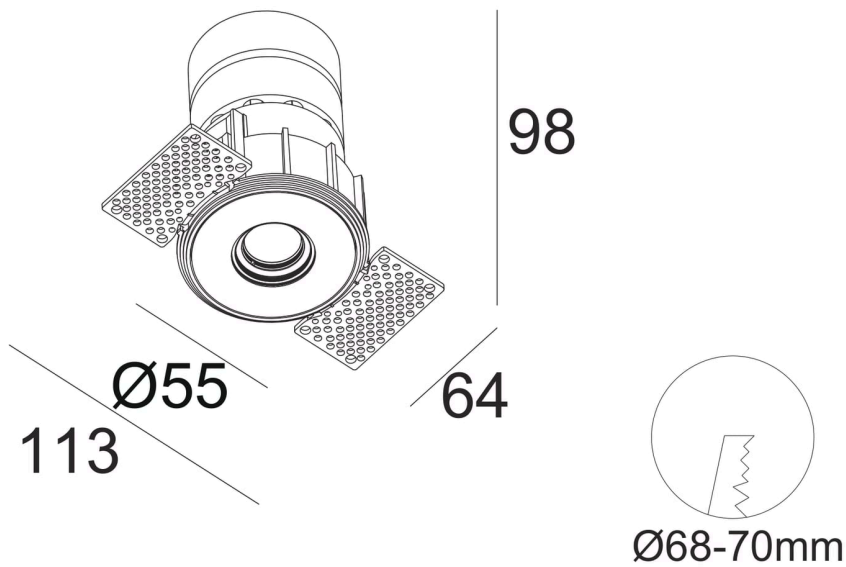

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1892	15–36°	18 W	max 36 V	1040 lm	97 CRI	Housing Ø55, plaster flange 113 × 64, height 98 mm	Ø68 mm	350 mA


Finishes



Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1892, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1892, 18 W, wide distribution

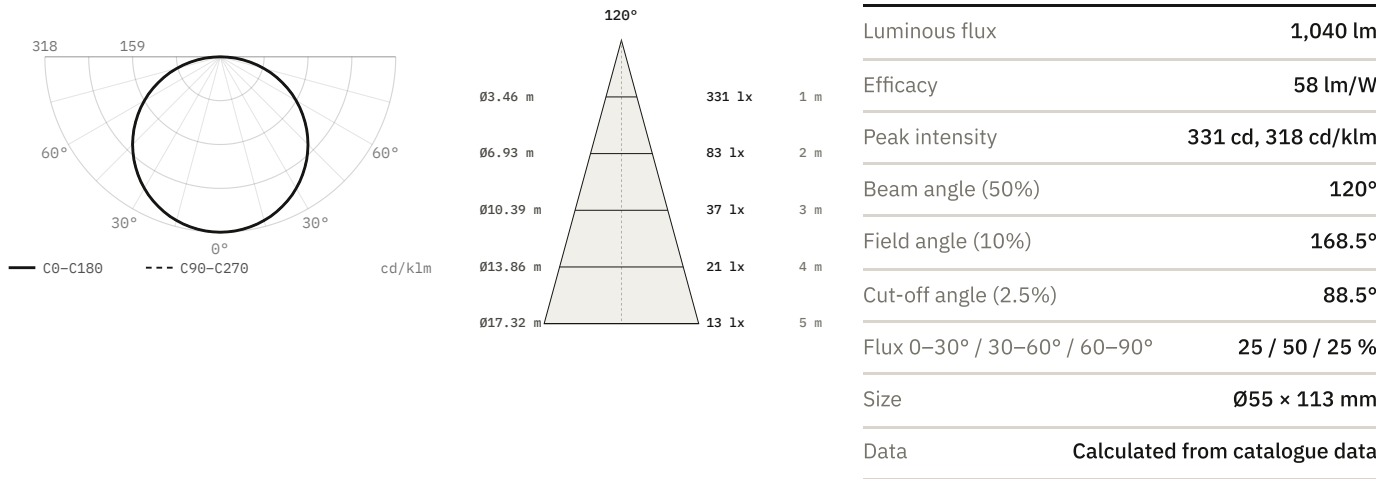

DiaNoche
Via Tortona, 31, 20144 Milano MI, Italy
service@dianoche.it
dianoche.it

Technical data may change without notice.