

Recessed

Robo DL1951

Recessed spotlight




Recessed spotlight. 7 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø55 mm
- LED source: Citizen

Power 7 W	Voltage max 20 V	Luminous flux 560 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	IP rating IP20
Certifications CE	Mounting Recessed	Finishes White, Black

Dimensions

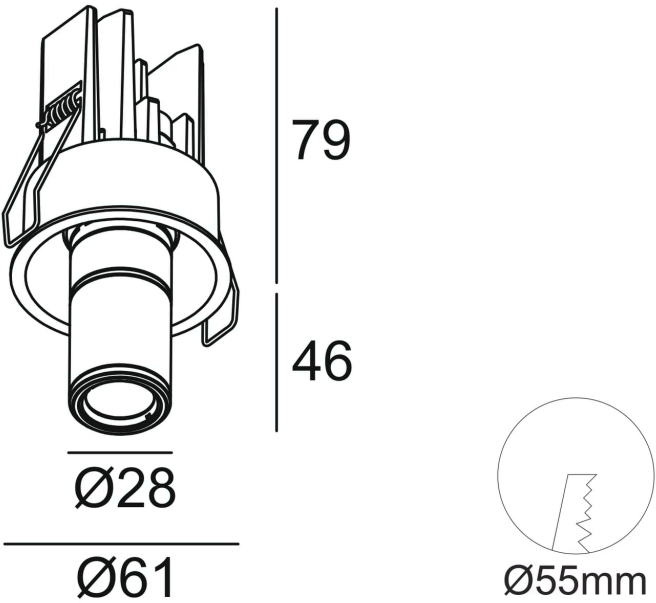

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1951	15–36°	7 W	max 20 V	560 lm	97 CRI	Trim Ø61, barrel Ø28, heights 79 + 46 mm	Ø55 mm	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1951, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1951, 7 W, wide distribution

