

Recessed

Robo Zoom DL1342

Recessed spotlight




Recessed spotlight. 26 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø2 mm
- LED source: Citizen

Power 26 W	Voltage 2 × max 37 V	Luminous flux 2 × 1180 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	IP rating IP20
Certifications CE	Mounting Recessed	Finishes White

Dimensions

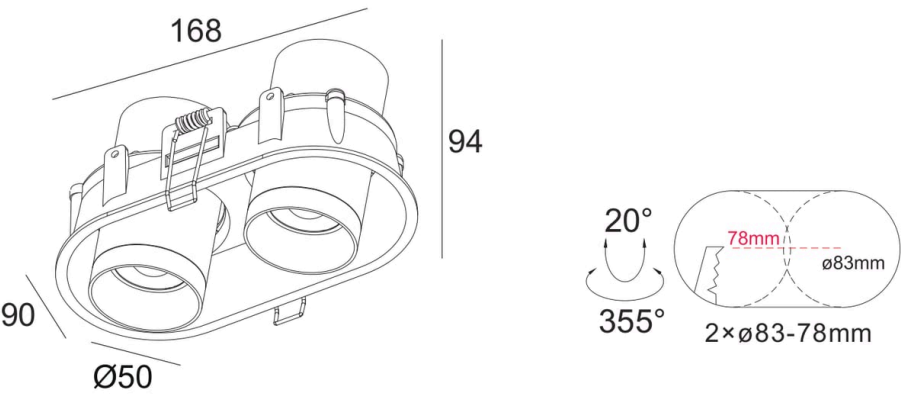

Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1342	2 heads, 15–60°	26 W	2 × max 37 V	2 × 1180 lm	97 CRI	168 × 90 mm oval flange, Ø50 heads, H94 mm	Ø2 mm	350 mA; Power per head

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1342, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL1342, 26 W, wide distribution

