

Recessed

Robo Zoom DL0800

Recessed spotlight




Recessed spotlight. 13 W. 2700, 3000, 4000 K. 97 CRI.

- Ceiling cut-out Ø83 mm
- LED source: Citizen

Power 13 W	Voltage max 37 V	Luminous flux 1180 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	IP rating IP20
Certifications CE	Mounting Recessed	Finishes White

Dimensions

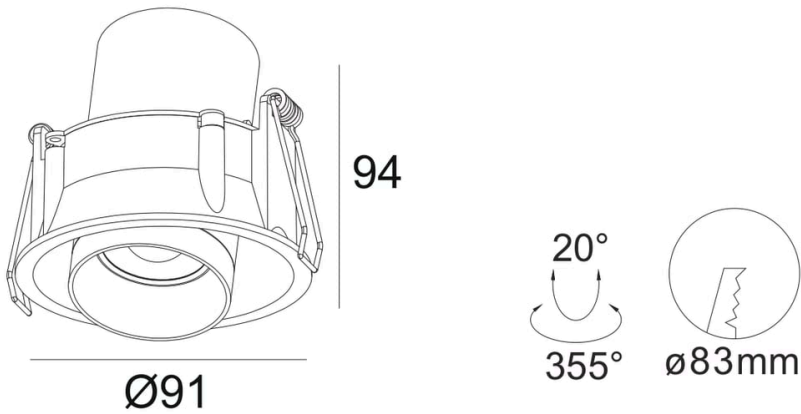


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL0800	15-60°	13 W	max 37 V	1180 lm	97 CRI	Ø91 mm x H94 mm	Ø83 mm	350 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0800, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0800, 13 W, wide distribution

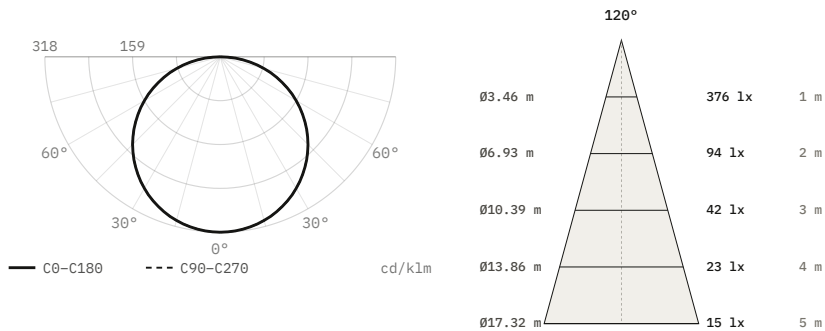

Luminous flux	1,180 lm
Efficacy	91 lm/W
Peak intensity	376 cd, 318 cd/klm
Beam angle (50%)	120°
Field angle (10%)	168.5°
Cut-off angle (2.5%)	88.5°
Flux 0–30° / 30–60° / 60–90°	25 / 50 / 25 %
Size	Ø91 × 94 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.