

Recessed

# Roll DL1990

Recessed spotlight




Recessed spotlight. 7 W. 2700, 3000, 4000 K. 97 CRI.

— Ceiling cut-out Ø68 mm

— LED source: Citizen

|                                              |                      |                         |
|----------------------------------------------|----------------------|-------------------------|
| Power<br>7 W                                 | Voltage<br>max 19 V  | Luminous flux<br>480 lm |
| Colour temperature<br>2700 K, 3000 K, 4000 K | CRI<br>97 CRI        | IP rating<br>IP20       |
| Certifications<br>CE                         | Mounting<br>Recessed | Finishes<br>Black       |

Dimensions

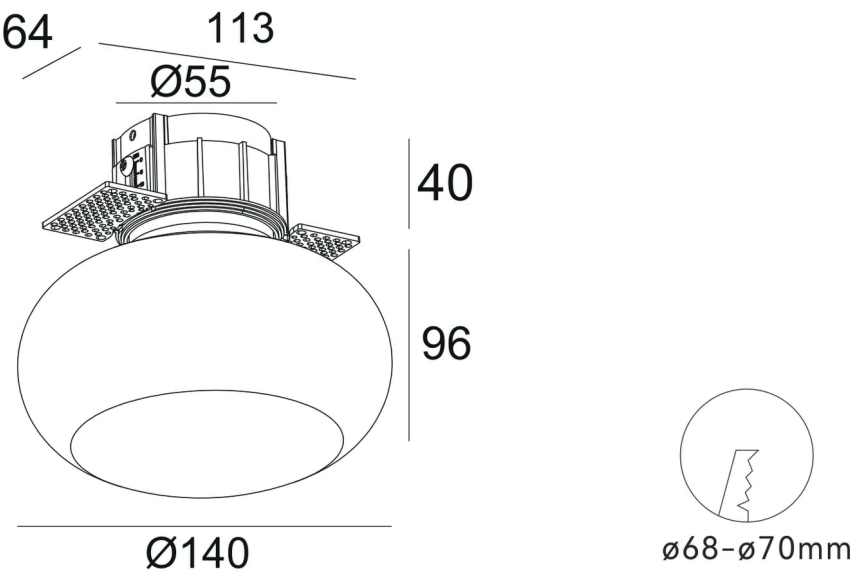

Models

| Code   | Power | Voltage  | Flux   | CRI    | Size                            | Cut-out | Notes  |
|--------|-------|----------|--------|--------|---------------------------------|---------|--------|
| DL1990 | 7 W   | max 19 V | 480 lm | 97 CRI | Ø140 × 96 mm (+40 recess depth) | Ø68 mm  | 350 mA |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1990, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## DL1990, 7 W, wide distribution

