

Linear

Rome OL-W2NF24120T09-8A30

Linear luminaire



Linear luminaire. 14.4 W. 125.9° beam. 4000 K. 97 CRI.

— LED source: Citizen

Power 14.4 W	Voltage 24 V	Luminous flux R 125 / m, G 355 / m, B 80 / m, RGB 525 lm/m
Colour temperature 4000 K	CRI 97 CRI	Beam angles 125.9°
IP rating IP20	Certifications CE, RoHS, UL, ErP	Mounting Recessed
Finishes Black		


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Beam	Notes
OL-W2NF24120T09-8A30	14.4 W, 120 LED/m, 24 V, RGB	14.4 W	24 V	R 125 / m, G 355 / m, B 80 / m, RGB 525 lm/m	97 CRI	W8 x T1.3 mm	125.9°	Power per metre

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


14.4 W

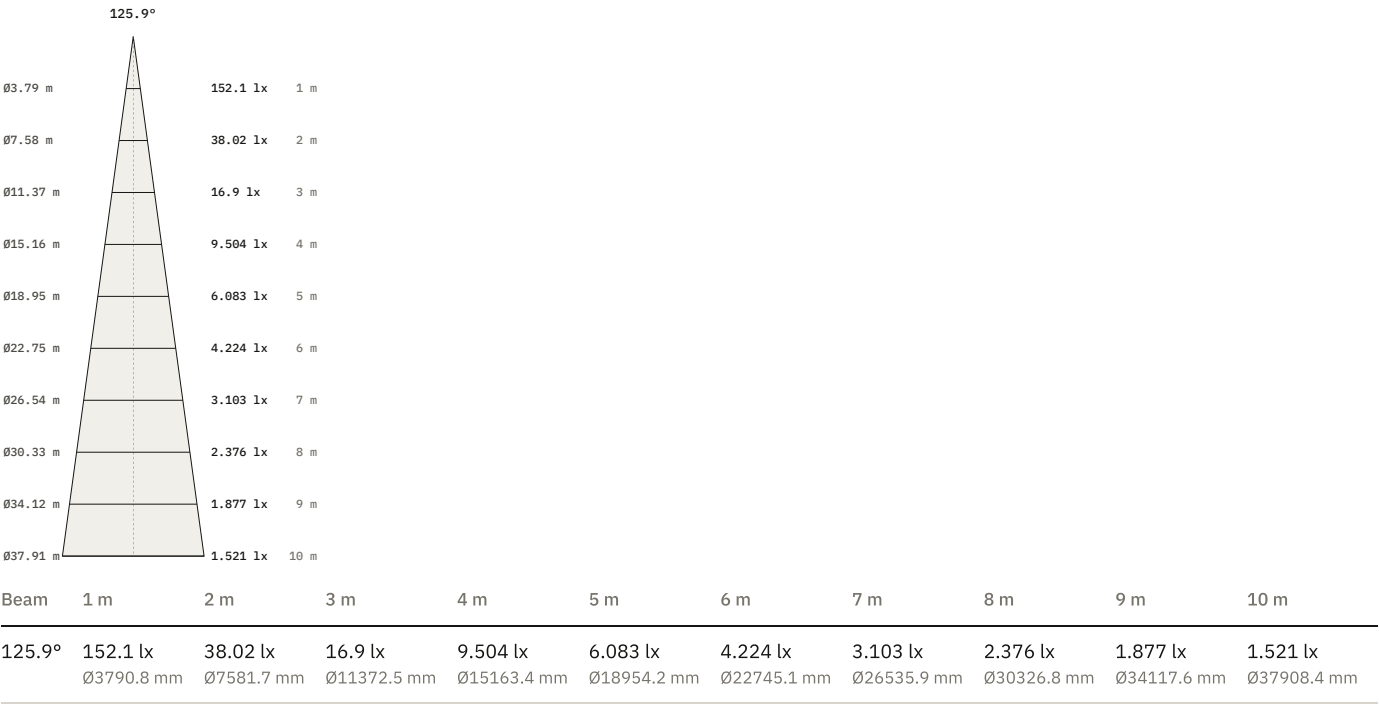

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OL-W2NF24120T09-8A30, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OL-W2NF24120T09-8A30, 14.4 W, 125.9° beam

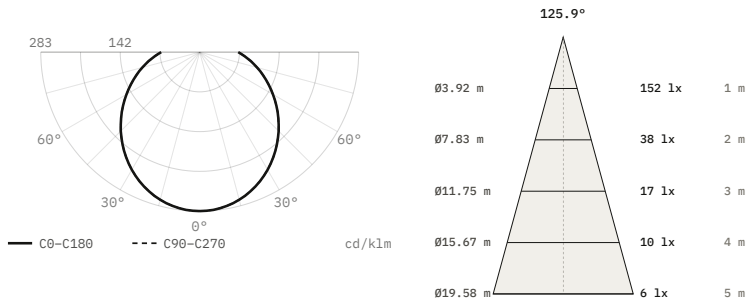

Luminous flux	537 lm
Efficacy	37 lm/W
Peak intensity	152 cd, 283 cd/klm
Beam angle (50%)	125.9°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	22.1 / 44.6 / 33.4 %
Size	8 × 0 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.