

Linear

Rome OL-DNNF24120T09F-8A38

Linear luminaire




Linear luminaire. 9.6 W. 117° beam. 4000 K. 97 CRI.

— LED source: Citizen

Power 9.6 W	Voltage 24 V	Luminous flux 960 lm/m
Colour temperature 4000 K	CRI 97 CRI	Beam angles 117°
IP rating IP20	Certifications CE, RoHS, UL, ErP	Mounting Recessed
Finishes Black		

Dimensions

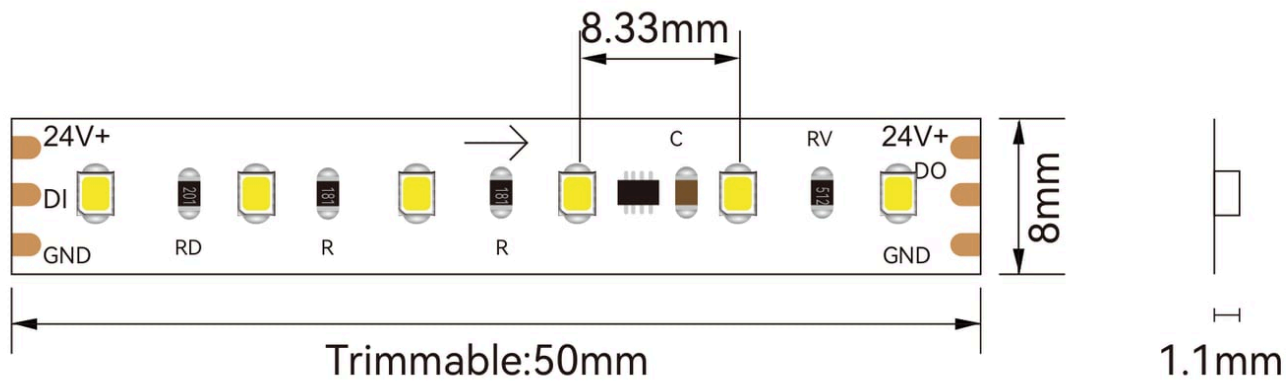


Models

Code	Version	Power	Voltage	Flux	CRI	Size	Beam
OL-DNNF24120T09F-8A38	9.6 W, 120 LED/m, 24 V, IP20	9.6 W	24 V	960 lm/m	97 CRI	W8 x T1.1 mm	117°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


9.6 W

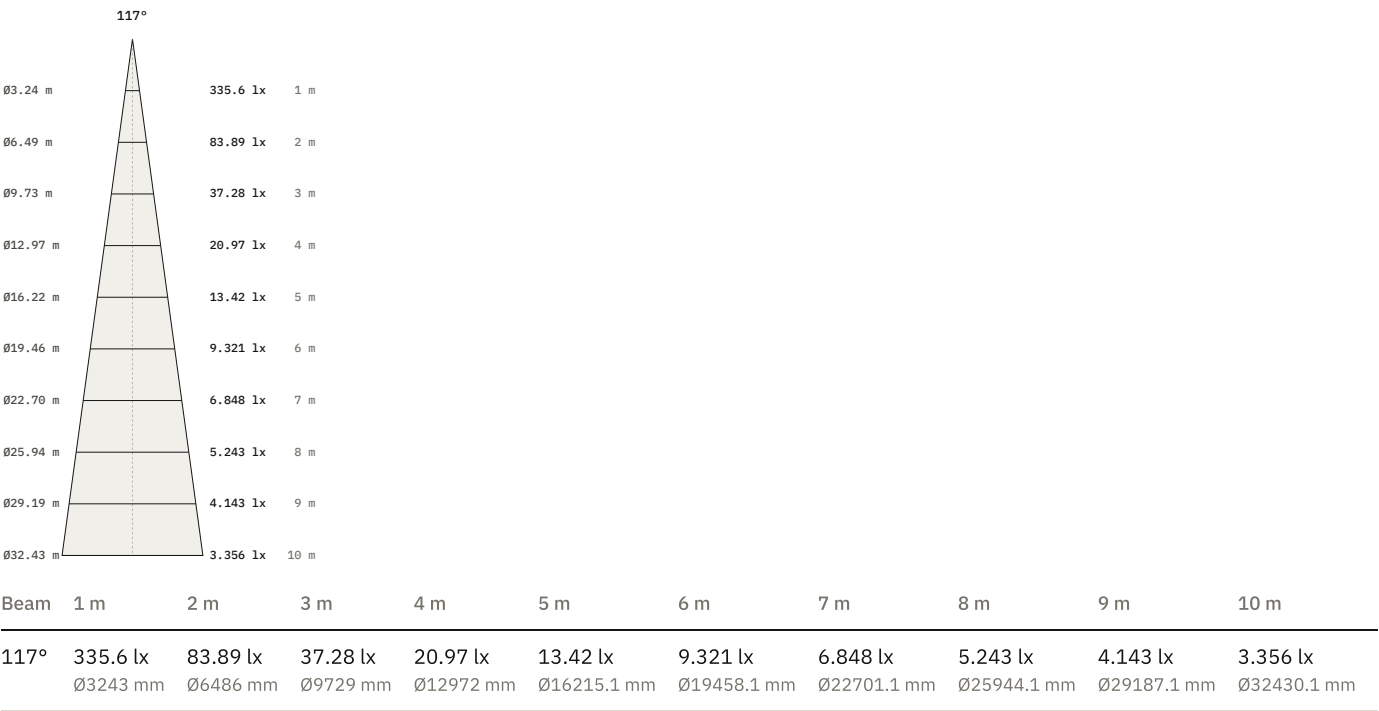

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for OL-DNNF24120T09F-8A38, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

OL-DNNF24120T09F-8A38, 9.6 W, 117° beam

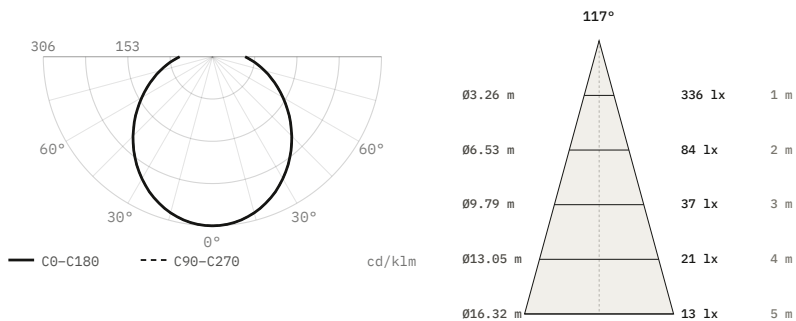

Luminous flux	1,097 lm
Efficacy	114 lm/W
Peak intensity	336 cd, 306 cd/klm
Beam angle (50%)	117°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	23.6 / 45.4 / 31 %
Size	8 × 0 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.