

Linear

S3-0066

Linear track luminaire




Linear track luminaire. 40 W. 60° or 90° beam. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 40 W	Luminous flux 5400–5500 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 60°, 90°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Magnetic track	Control DALI, 0-10V, Triac, Casambi
Finishes White, Black, Grey		

Dimensions

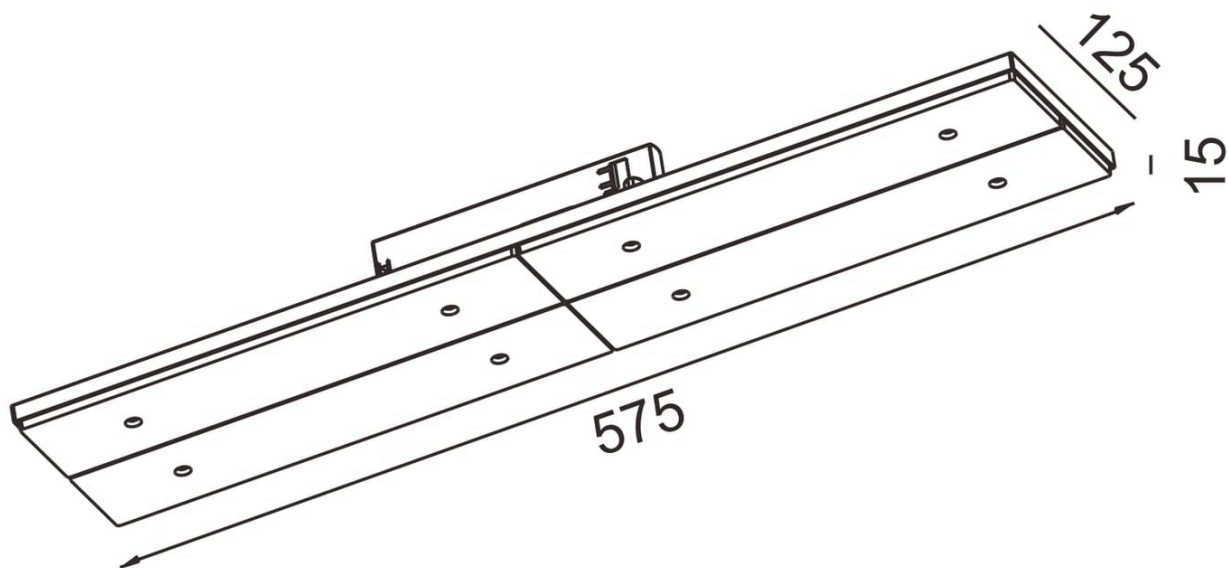

Models

Code	Power	Flux	CRI	Size	Beam
S3-0066	40 W	5400–5500 lm	97 CRI	575 × 125 × 15 mm	60° 90°

Finishes



Black




Grey

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.


40 W

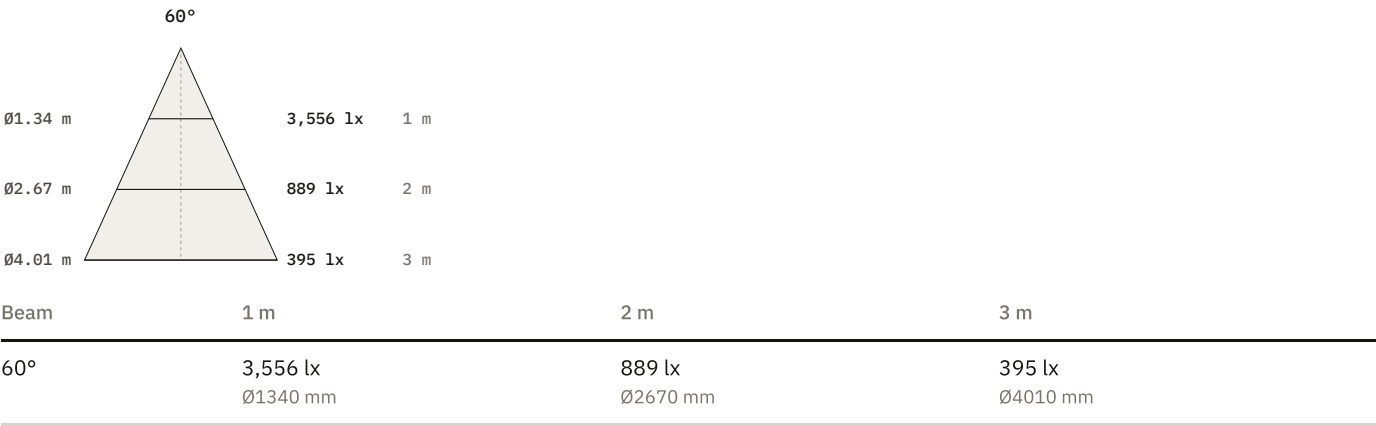

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for S3-0066, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

S3-0066, 40 W, 60° beam

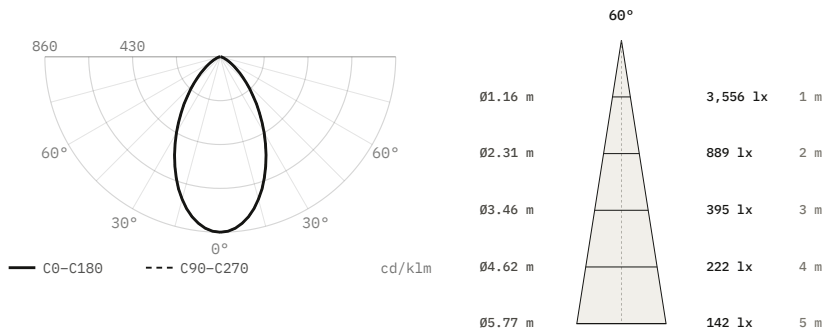

Luminous flux	4,133 lm
Efficacy	103 lm/W
Peak intensity	3,556 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	575 × 125 × 15 mm
Data	Calculated from catalogue data

S3-0066, 40 W, 90° beam

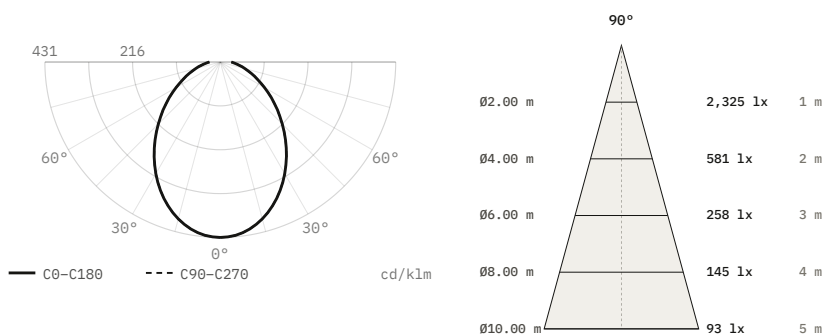

Luminous flux	5,400 lm
Efficacy	135 lm/W
Peak intensity	2,325 cd, 431 cd/klm
Beam angle (50%)	90°
Field angle (10%)	164°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	31.2 / 48 / 20.8 %
Size	575 × 125 × 15 mm
Data	Calculated from catalogue data