

Linear

S3-0068

Linear track luminaire




Linear track luminaire. 30 W. 60° beam. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power	Luminous flux	Colour temperature
30 W	3600–3700 lm	3000 K, 4000 K
CRI	Beam angles	IP rating
97 CRI	60°	IP20
Certifications	Mounting	Control
CE, RoHS, EMC, LVD	Magnetic track	DALI, 0-10V, Triac, Casambi
Finishes		
White, Black, Grey		

Dimensions

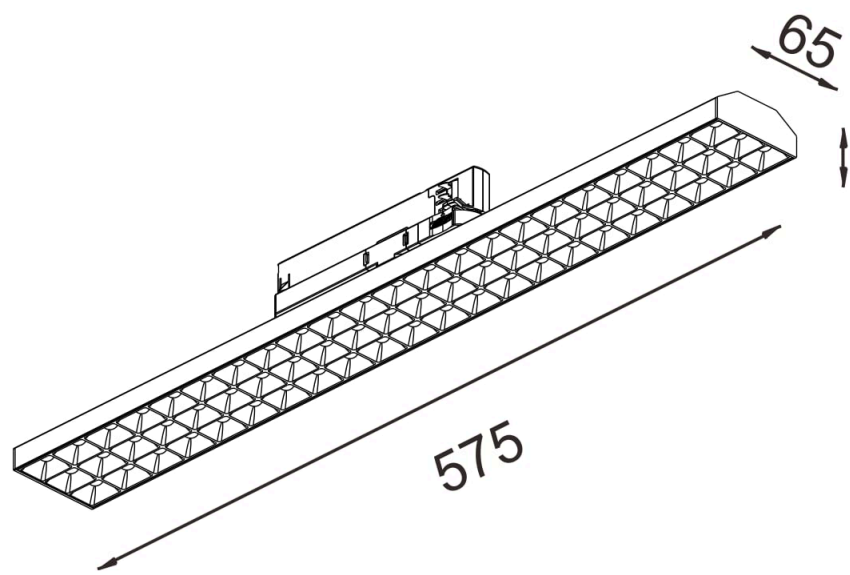


Models

Code	Power	Flux	CRI	Size	Beam
S3-0068	30 W	3600–3700 lm	97 CRI	575 × 65 × 25 mm	60°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

30 W

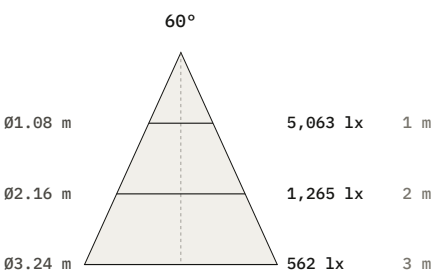

Beam	1 m	2 m	3 m
60°	5,063 lx Ø1080 mm	1,265 lx Ø2160 mm	562 lx Ø3240 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for S3-0068, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

S3-0068, 30 W, 60° beam

