Linear

S3-0068B

Linear track luminaire

Linear track luminaire. 30 W. 60° beam. 3000, 4000 K. 97 CRI.

- LED source: Citizen

Power **30 W**	Luminous flux **3600–3700 lm**	Colour temperature **3000 K, 4000 K**
CRI **97 CRI**	Beam angles **60°**	IP rating **IP20**
Certifications **CE, RoHS, EMC, LVD**	Mounting **Magnetic track**	Control **DALI, 0-10V, Triac, Casambi**
Finishes **White, Black, Grey**		

Dimensions

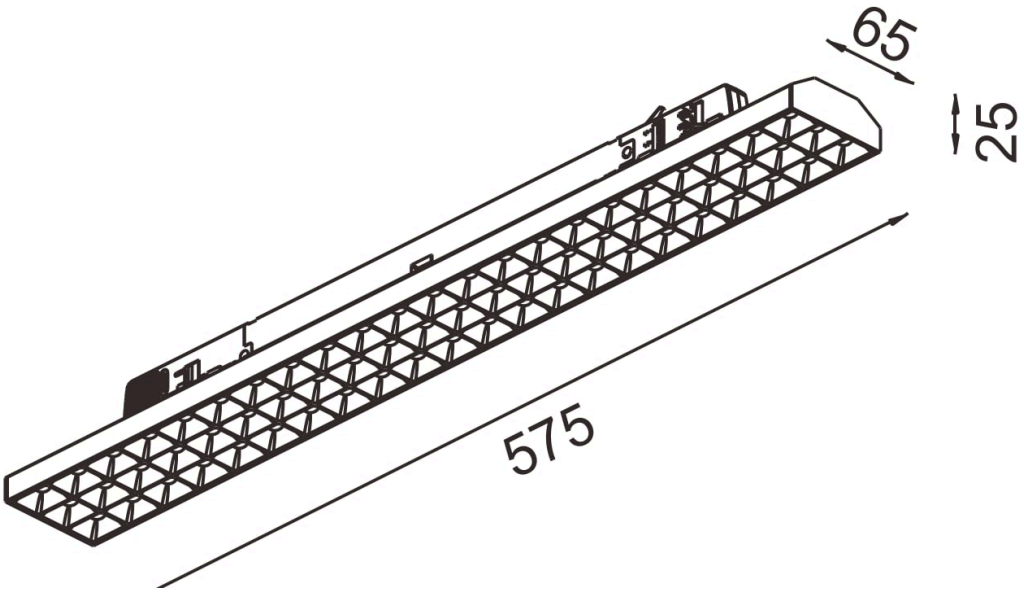

Models

Code	Version	Power	Flux	CRI	Size	Beam
S3-0068B	B version	30 W	3600–3700 lm	97 CRI	575 × 65 × 25 mm	60°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

30 W

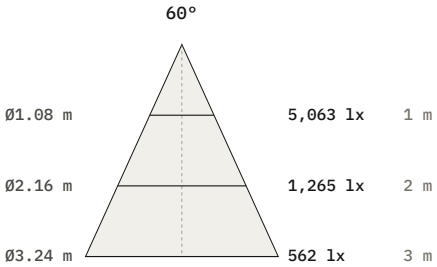

Beam	1 m	2 m	3 m
60°	5,063 lx Ø1080 mm	1,265 lx Ø2160 mm	562 lx Ø3240 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for S3-0068B, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

S3-0068B, 30 W, 60° beam

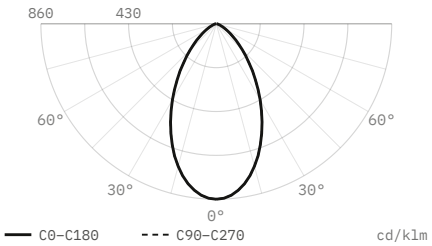

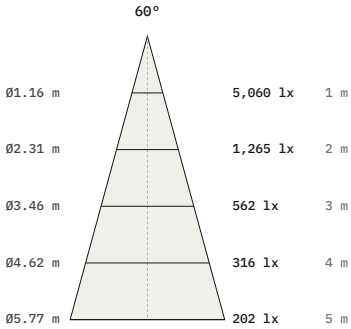

Luminous flux	5,882 lm
Efficacy	196 lm/W
Peak intensity	5,060 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	575 × 65 × 25 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.