

Linear

S3-0072-2

Linear track luminaire




Linear track luminaire. 30 W. Four beam angles, 30° to 110°. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 30 W	Luminous flux 4200–4300 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	Beam angles 30°, 60°, 90°, 110°	IP rating IP20
Certifications CE, RoHS, EMC, LVD	Mounting Magnetic track	Control DALI, 0-10V, Triac, Casambi
Finishes White, Black, Grey		

Dimensions

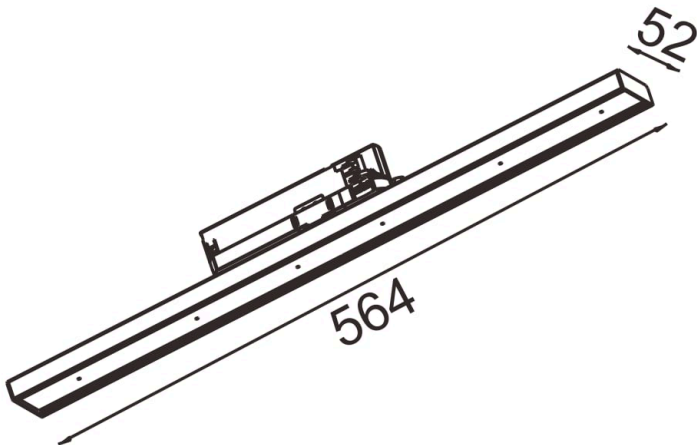


Models

Code	Power	Flux	CRI	Size	Beam
S3-0072-2	30 W	4200–4300 lm	97 CRI	564 × 52 mm	30° 60° 90° 110°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

30 W

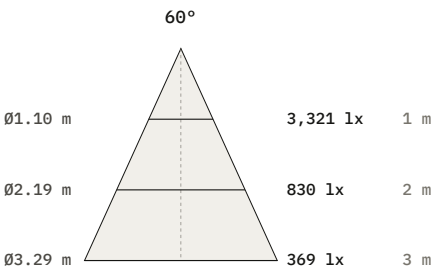


Beam	1 m	2 m	3 m
60°	3,321 lx Ø1100 mm	830 lx Ø2190 mm	369 lx Ø3290 mm

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for S3-0072-2, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

S3-0072-2, 30 W, 60° beam

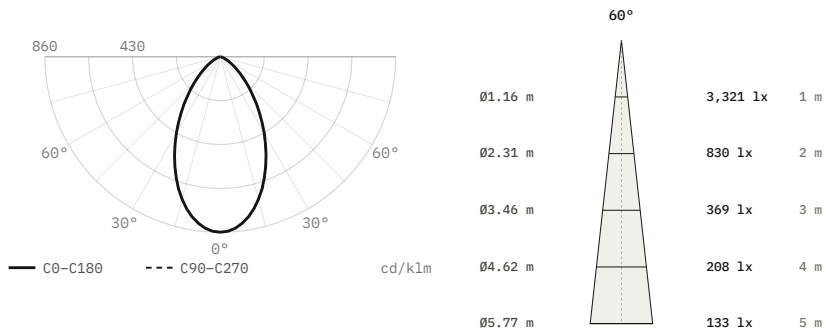

Luminous flux	3,860 lm
Efficacy	129 lm/W
Peak intensity	3,321 cd, 860 cd/klm
Beam angle (50%)	60°
Field angle (10%)	109.4°
Cut-off angle (2.5%)	69°
Flux 0–30° / 30–60° / 60–90°	52.4 / 42.6 / 5 %
Size	564 × 52 mm
Data	Calculated from catalogue data

S3-0072-2, 30 W, 30° beam

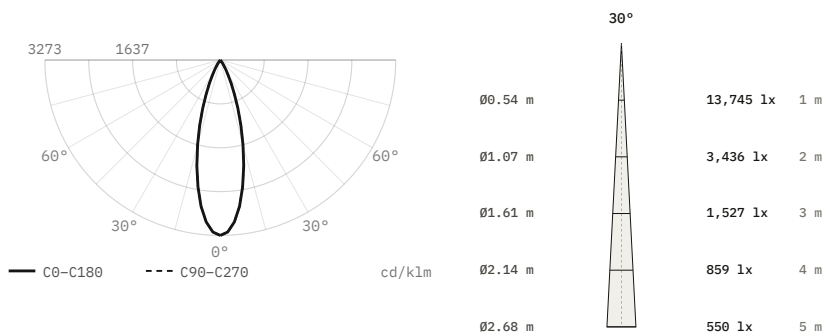


Luminous flux	4,200 lm
Efficacy	140 lm/W
Peak intensity	13,745 cd, 3,273 cd/klm
Beam angle (50%)	30°
Field angle (10%)	54.7°
Cut-off angle (2.5%)	34.5°
Flux 0–30° / 30–60° / 60–90°	94 / 6 / 0 %
Size	564 × 52 mm
Data	Calculated from catalogue data

S3-0072-2, 30 W, 90° beam



Luminous flux	4,200 lm
Efficacy	140 lm/W
Peak intensity	1,808 cd, 431 cd/klm
Beam angle (50%)	90°
Field angle (10%)	164°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	31.2 / 48 / 20.8 %
Size	564 × 52 mm
Data	Calculated from catalogue data

S3-0072-2, 30 W, 110° beam

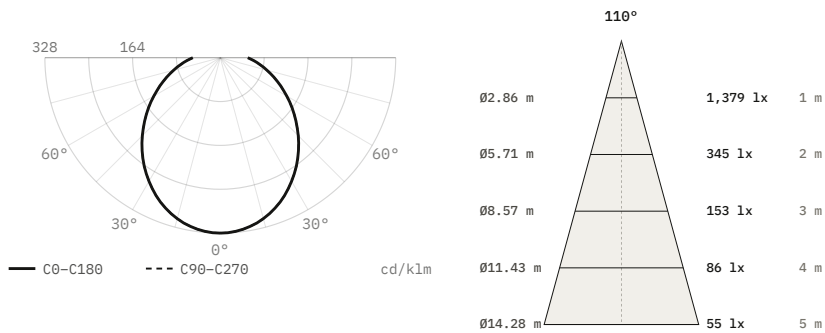

Luminous flux	4,200 lm
Efficacy	140 lm/W
Peak intensity	1,379 cd, 328 cd/klm
Beam angle (50%)	110°
Cut-off angle (2.5%)	90°
Flux 0–30° / 30–60° / 60–90°	25 / 46.2 / 28.8 %
Size	564 × 52 mm
Data	Calculated from catalogue data

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.