

Linear

S3-1130F

Linear track luminaire




Linear track luminaire. 50 W. 3000, 4000 K. 97 CRI.

— LED source: Citizen

Power 50 W	Luminous flux 7500–7600 lm	Colour temperature 3000 K, 4000 K
CRI 97 CRI	IP rating IP20	Certifications CE, RoHS, EMC, LVD
Mounting Magnetic track	Control DALI, 0-10V, Triac, Casambi	Finishes White, Black, Grey

Dimensions

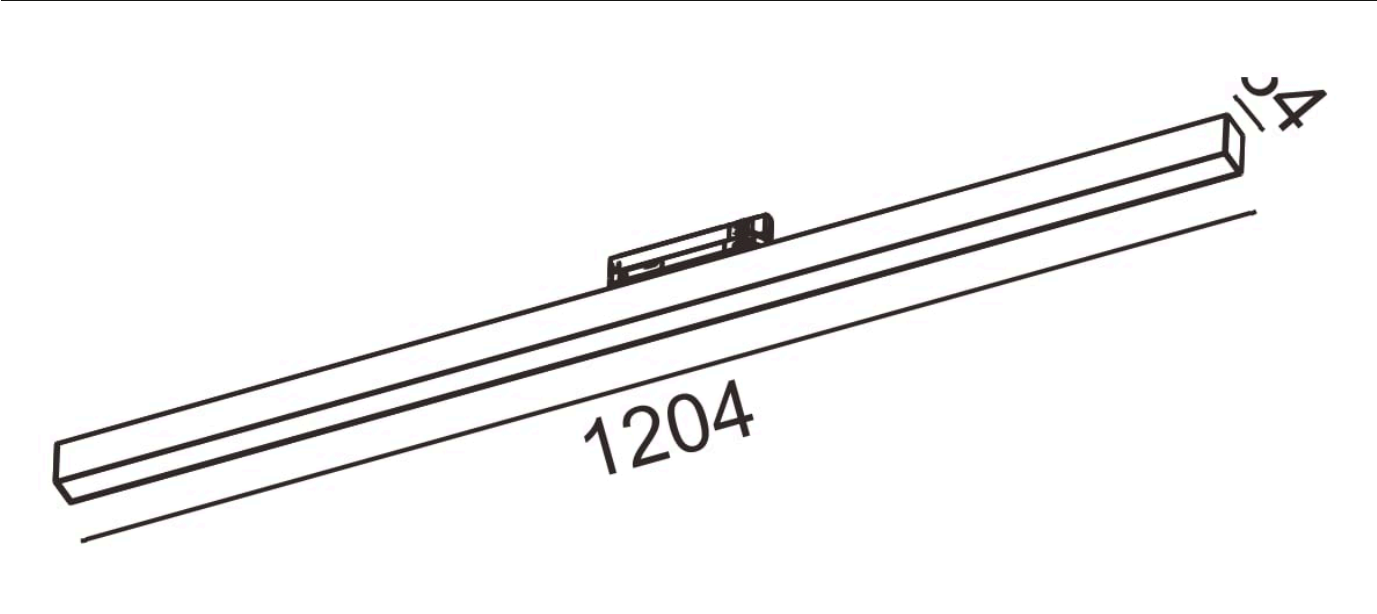


Models

Code	Version	Power	Flux	CRI	Size
S3-1130F	Flood	50 W	7500–7600 lm	97 CRI	1204 × 46 × 34 mm

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

50 W

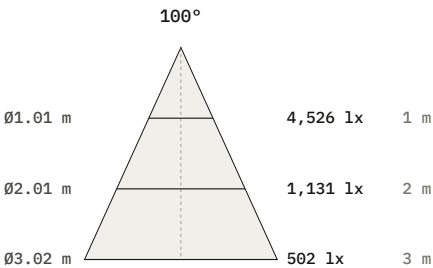


Beam	1 m	2 m	3 m
100°	4,526 lx Ø1010 mm	1,131 lx Ø2010 mm	502 lx Ø3020 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for S3-1130F, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

S3-1130F, 50 W, 100° beam

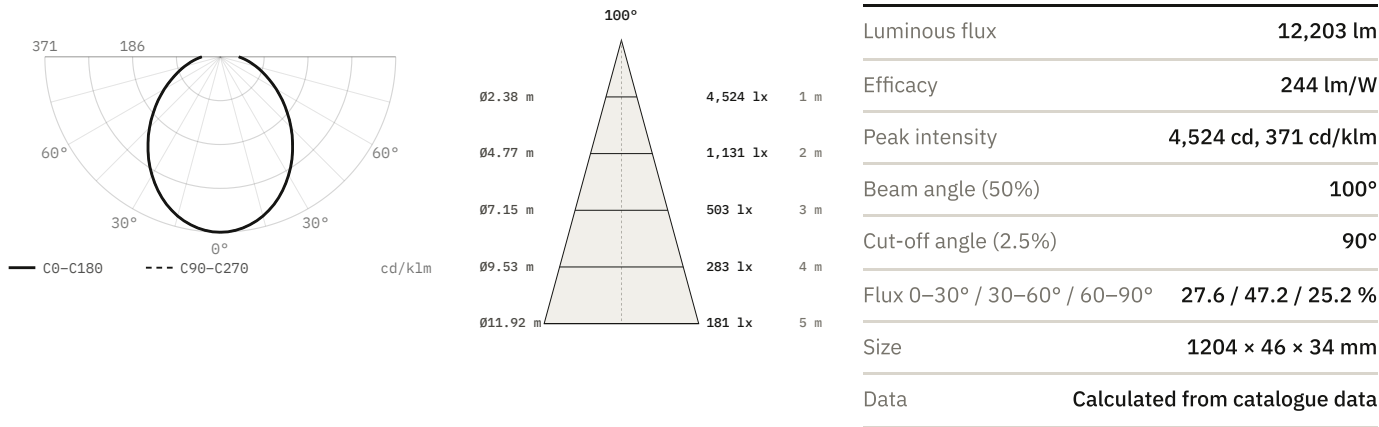

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.