Chandel-Track 13 mm system

# SM06-DF400

Chandel-Track linear luminaire




Linear luminaire for the Chandel-Track 48 V track system. 10 W. 105° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

- LED source: Citizen

| Power | Voltage | Colour temperature |
|---|---|---|
| **10 W** | **48 V DC** | **2700 K, 3000 K, 4000 K, 5000 K** |
| CRI | Beam angles | Mounting |
| **97 CRI** | **105°** | **Magnetic track** |
| Finishes | | |
| **Black** | | |

## Dimensions

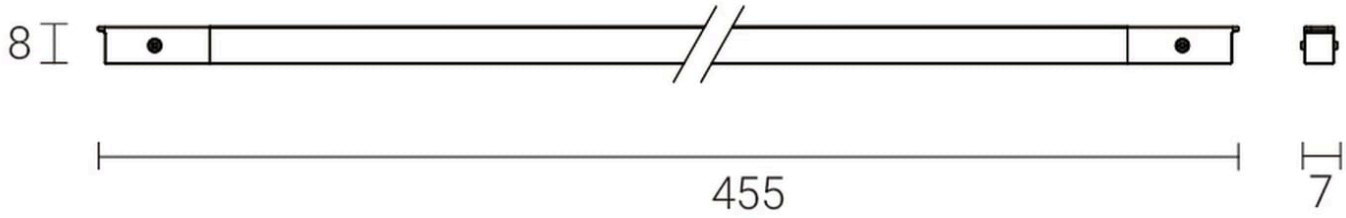



## Models


| Code | Power | Voltage | CRI | Size | Beam |
|---|---|---|---|---|---|
| **SM06-DF400** | 10 W | 48 V DC | 97 CRI | 455 × 7 × 8 mm | 105° |

# Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SM06-DF400, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

## SM06-DF400, 10 W, 105° beam

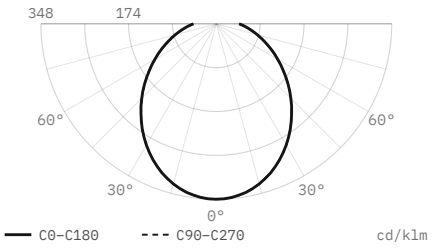

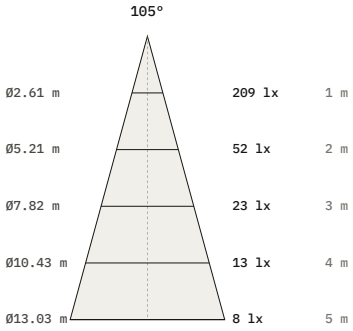
| | |
|---|---|
| Luminous flux | 600 lm |
| Efficacy | 60 lm/W |
| Peak intensity | 209 cd, 348 cd/klm |
| Beam angle (50%) | 105° |
| Cut-off angle (2.5%) | 90° |
| Flux 0–30° / 30–60° / 60–90° | 26.2 / 46.7 / 27.1 % |
| Size | 455 × 7 × 8 mm |
| Data | Estimated from catalogue data |

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.