Chandel-Track 13 mm system

SM06-LBR28

Chandel-Track linear luminaire




Linear luminaire for the Chandel-Track 48 V track system. 5 W. 60° beam. 2700, 3000, 4000, 5000 K. 97 CRI.

- LED source: Citizen

Power	Voltage	Colour temperature
5 W	48 V DC	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Beam angles**	**Mounting**
97 CRI	60°	Magnetic track
Finishes		
Black		

Dimensions

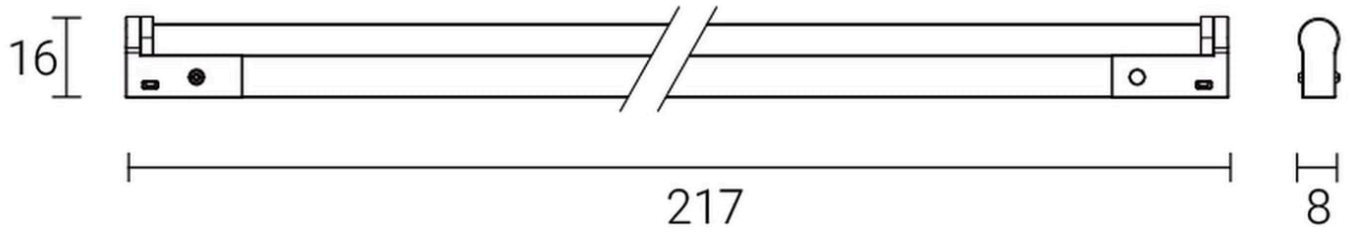


Models


Code	Power	Voltage	CRI	Size	Beam
SM06-LBR28	5 W	48 V DC	97 CRI	217 × 8 × 16 mm	60°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SM06-LBR28, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SM06-LBR28, 5 W, 60° beam

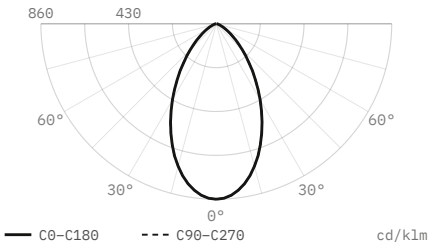

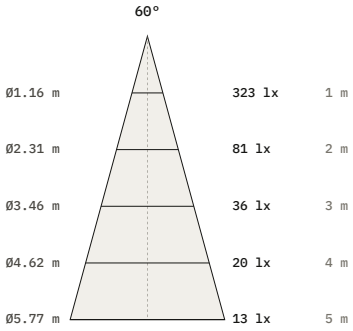

Luminous flux	**375 lm**
Efficacy	**75 lm/W**
Peak intensity	**323 cd, 860 cd/klm**
Beam angle (50%)	**60°**
Field angle (10%)	**109.4°**
Cut-off angle (2.5%)	**69°**
Flux 0–30° / 30–60° / 60–90°	**52.4 / 42.6 / 5 %**
Size	**217 × 8 × 16 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.