Chandel-Track 13 mm system

SM06-TL3

Chandel-Track spotlight



Spotlight for the Chandel-Track 48 V track system.
2.5 W. 30° beam. 2700, 3000, 4000, 5000 K. 97 CRI.


- LED source: Citizen

Power	Voltage	Colour temperature
2.5 W	48 V DC	2700 K, 3000 K, 4000 K, 5000 K
CRI	**Beam angles**	**Mounting**
97 CRI	30°	Magnetic track

Finishes

Black

Dimensions

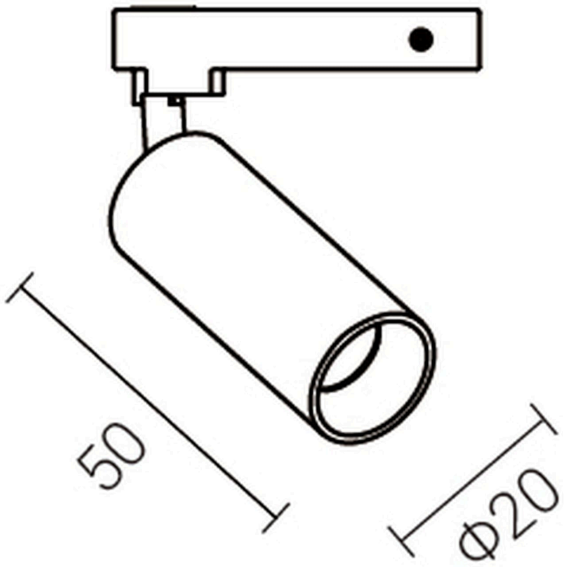


Models


Code	Power	Voltage	CRI	Size	Beam
SM06-TL3	2.5 W	48 V DC	97 CRI	Ø20 × 50 mm	30°

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SM06-TL3, from the same data as the IES and LDT files on the product page. Estimated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SM06-TL3, 2.5 W, 30° beam

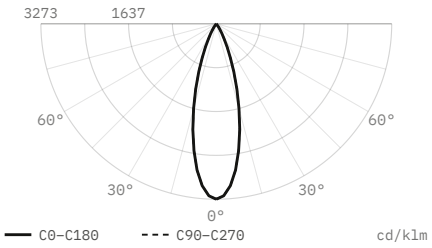

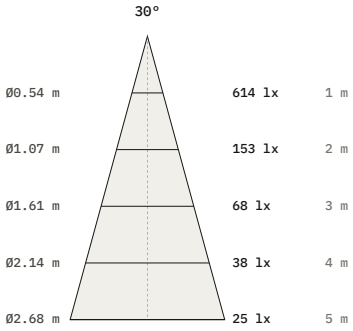

Luminous flux	**188 lm**
Efficacy	**75 lm/W**
Peak intensity	**614 cd, 3,273 cd/klm**
Beam angle (50%)	**30°**
Field angle (10%)	**54.7°**
Cut-off angle (2.5%)	**34.5°**
Flux 0–30° / 30–60° / 60–90°	**94 / 6 / 0 %**
Size	**Ø20 × 50 mm**
Data	**Estimated from catalogue data**

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.