

Recessed

Sparkle Globe Trimless 2217FT

Sparkle recessed spotlight




Recessed spotlight from the Sparkle range. 5 W. 100° beam. 3000 K. 97 CRI.

- Ceiling cut-out Ø42 mm
- Rotation 350°
- LED source: Citizen (included)
- Driver: 36V 120mA

Power 5 W	Voltage 36 V	Colour temperature 3000 K
CRI 97 CRI	Beam angles 100°	IP rating IP20
Mounting Recessed	Control Two-colour temperature, RGBW	Finishes ; others on request

Dimensions

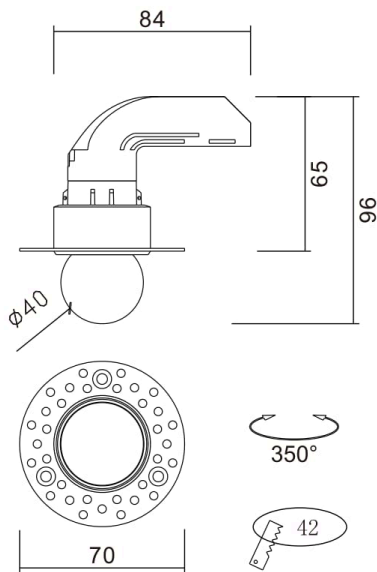


Models

Code	Version	Power	Voltage	CRI	Size	Cut-out	Beam
2217FT	5 W	5 W	36 V	97 CRI	Ø70 mm ring × 96 mm high × 84 mm wide; Ø40 mm globe	Ø42 mm	100°

Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

5 W, 3000 K

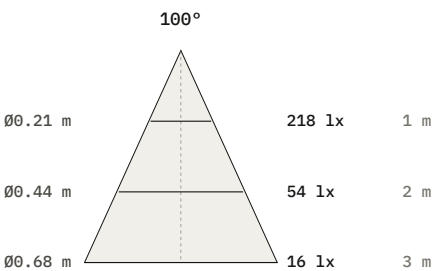

Beam	1 m	2 m	3 m
100°	218 lx Ø215 mm	54 lx Ø441 mm	16 lx Ø684 mm

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for 2217FT, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

2217FT, 5 W, 100° beam

