

Suspended

Sparkle Pendant Trimless 2217PT

Sparkle pendant




Pendant from the Sparkle range. 5 or 7 W. Beam angles 15° to 36°, by model. 3000 K. 97 CRI.

- Ceiling cut-out Ø42 mm
- Reflectors in albino, chrome, gun black, gold, black
- LED source: Citizen (included)
- Driver: 7W: 36V 150mA, 5W: 3V 1200mA

Power	Voltage	Colour temperature
5 W, 7 W	36 V, 3 V	3000 K
CRI	Beam angles	IP rating
97 CRI	15°, 24°, 30°, 36°	IP20
Mounting	Finishes	
Suspended, Recessed	White, Black, Silver, Gold; others on request	

Dimensions

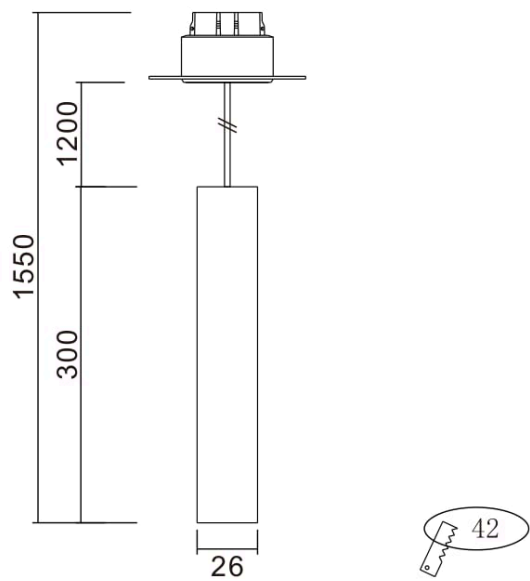




Models

Code	Version	Power	Voltage	CRI	Size	Cut-out	Beam
2217PT	7 W, Ø26, 1550 mm	7 W	36 V	97 CRI	Ø26 × 300 mm body on 1200 mm cable; 1550 mm overall	Ø42 mm	15° 24° 36°
2217PT	5 W, Ø18, 1750 mm	5 W	3 V	97 CRI	Ø18 × 500 mm body on 1200 mm cable; 1750 mm overall	Ø42 mm	30°


Photometric data

Illuminance on the beam axis (lx) and beam diameter at each mounting distance, per model and beam angle. IES files for every model and beam can be downloaded from the product page.

7 W, 3000 K

15°			24°			36°					
Ø0.19 m		2,083 lx	1 m	Ø0.38 m		1,425 lx	1 m	Ø0.50 m		976 lx	1 m
Ø0.42 m		521 lx	2 m	Ø0.76 m		356 lx	2 m	Ø1.00 m		244 lx	2 m
Ø0.62 m		231 lx	3 m	Ø1.13 m		158 lx	3 m	Ø1.50 m		108 lx	3 m
Beam		1 m		2 m		3 m					
15°		2,083 lx Ø188 mm		521 lx Ø416 mm		231 lx Ø623 mm					
24°		1,425 lx Ø378 mm		356 lx Ø755 mm		158 lx Ø1133 mm					
36°		976 lx Ø498 mm		244 lx Ø997 mm		108 lx Ø1495 mm					


5 W, 3000 K

30°			
Ø0.60 m		789 lx	1 m
Ø1.20 m		198 lx	2 m
Ø1.79 m		88 lx	3 m
Beam	1 m	2 m	3 m
30°	789 lx Ø597 mm	198 lx Ø1195 mm	88 lx Ø1793 mm

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for 2217PT, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

2217PT, 7 W, 15° beam

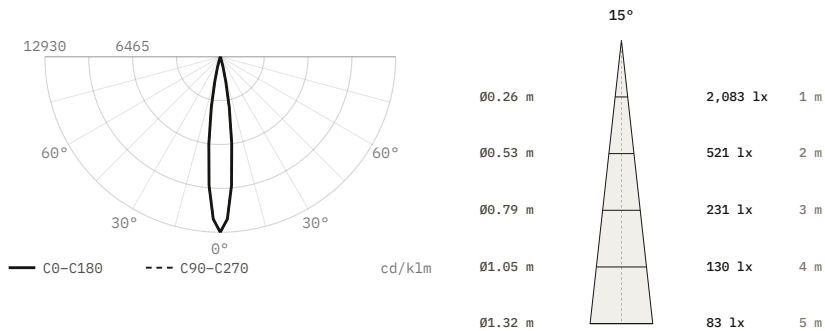


Luminous flux	161 lm
Efficacy	23 lm/W
Peak intensity	2,083 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø26 × 300 mm
Data	Calculated from catalogue data

2217PT, 7 W, 24° beam

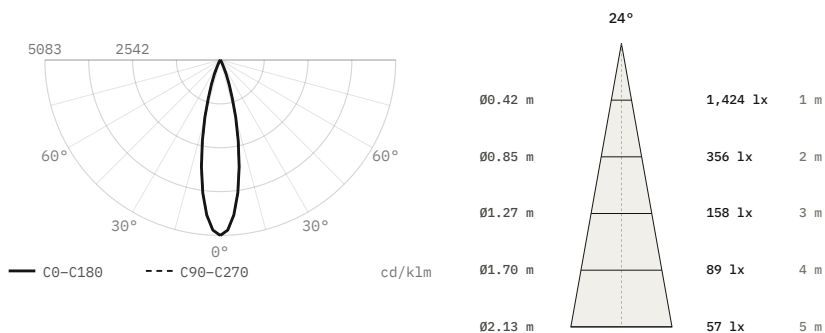

Luminous flux	280 lm
Efficacy	40 lm/W
Peak intensity	1,424 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø26 × 300 mm
Data	Calculated from catalogue data

2217PT, 7 W, 36° beam

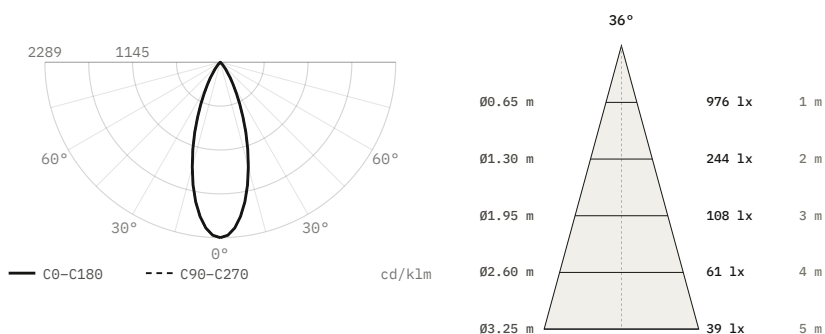

Luminous flux	426 lm
Efficacy	61 lm/W
Peak intensity	976 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø26 × 300 mm
Data	Calculated from catalogue data

