

Outdoor

Spike SL0030

Outdoor luminaire



Outdoor luminaire.

— LED source: Citizen

Voltage 24 V DC	Luminous flux 2 × 240 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 24°, 36°	IP rating IP65
Certifications CE	Mounting Floor, Surface, Wall	Finishes Black


Models

Code	Voltage	Flux	CRI	Size	Beam
SL0030	24 V DC	2 × 240 lm	97 CRI	Head Ø40 x L75 mm (two heads); overall H800 (includes ground blade H200 x W40 mm)	24° 36°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0030, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SL0030, 24° beam

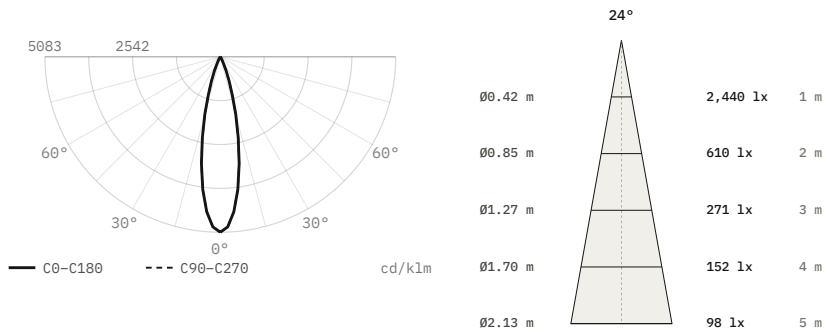

Luminous flux	480 lm
Peak intensity	2,440 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø40 × 75 mm
Data	Calculated from catalogue data

SL0030, 36° beam

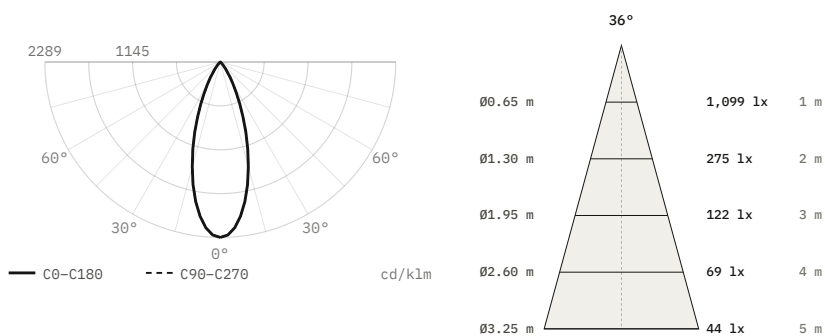

Luminous flux	480 lm
Peak intensity	1,099 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø40 × 75 mm
Data	Calculated from catalogue data