

Outdoor

Spike SL0038

Outdoor luminaire



Outdoor luminaire.

— LED source: Citizen

Voltage 24 V DC	Luminous flux 2 × 560 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 12°, 24°, 38°, 50°	IP rating IP65
Certifications CE	Mounting Floor, Surface, Wall	Finishes Black


Models

Code	Voltage	Flux	CRI	Size	Beam
SL0038	24 V DC	2 × 560 lm	97 CRI	Head Ø55 x L91 mm (two heads); overall H800 (includes ground blade H200 x W40 mm)	12° 24° 38° 50°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0038, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SL0038, 12° beam

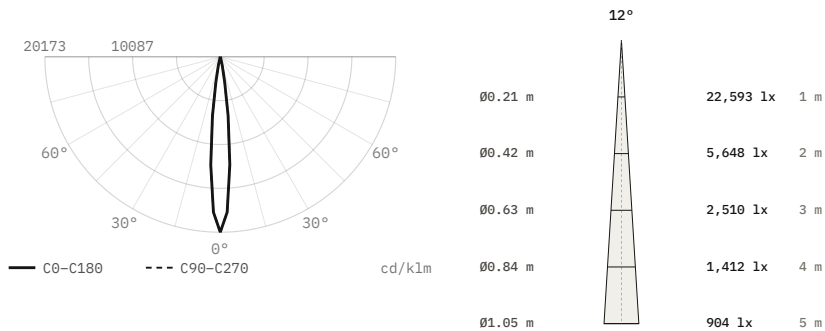


Luminous flux	1,120 lm
Peak intensity	22,593 cd, 20,173 cd/klm
Beam angle (50%)	12°
Field angle (10%)	21.9°
Cut-off angle (2.5%)	13.5°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø55 × 91 mm
Data	Calculated from catalogue data

SL0038, 24° beam

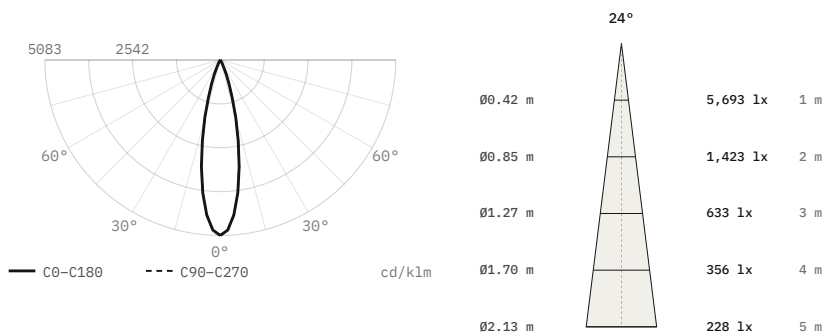


Luminous flux	1,120 lm
Peak intensity	5,693 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø55 × 91 mm
Data	Calculated from catalogue data

SL0038, 38° beam

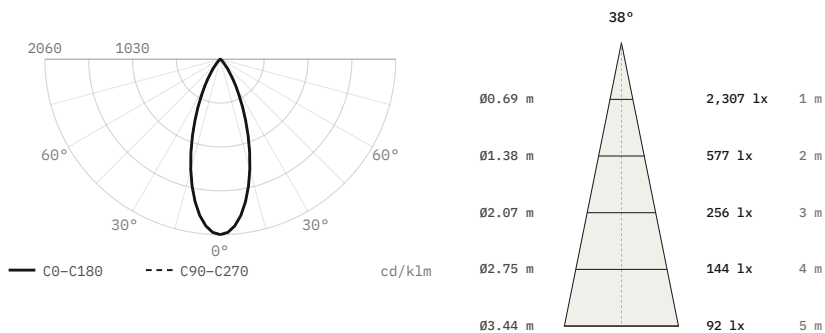

Luminous flux	1,120 lm
Peak intensity	2,307 cd, 2,060 cd/klm
Beam angle (50%)	38°
Field angle (10%)	69.3°
Cut-off angle (2.5%)	43.5°
Flux 0–30° / 30–60° / 60–90°	83 / 16.9 / 0.1 %
Size	Ø55 × 91 mm
Data	Calculated from catalogue data

SL0038, 50° beam

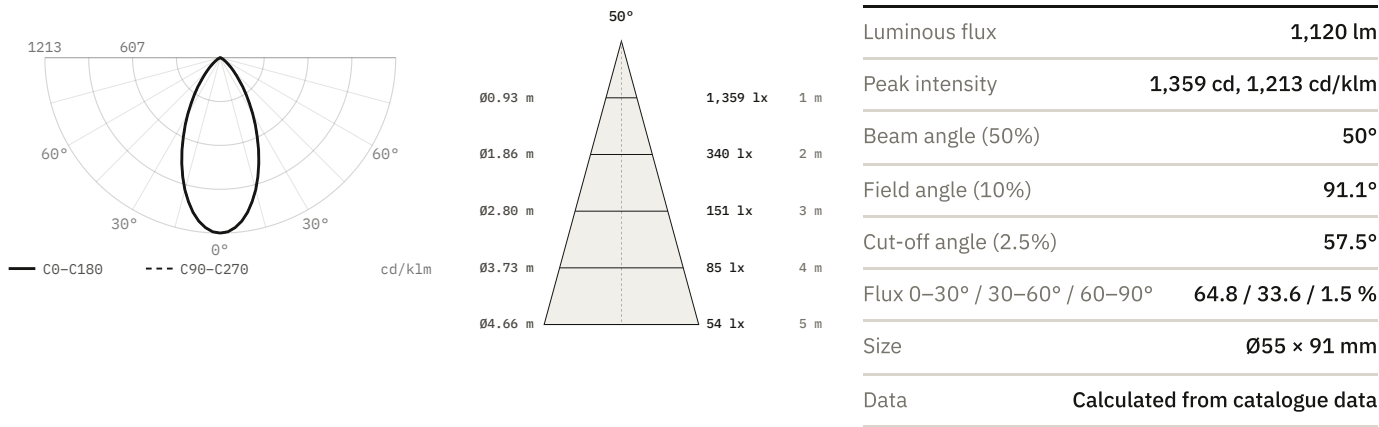

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.