

Outdoor

Spike SL0107

Outdoor luminaire



Outdoor luminaire.

— LED source: Citizen

Voltage 24 V DC	Luminous flux 3*560 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 15°, 24°, 36°, 50°	IP rating IP65
Certifications CE	Mounting Floor, Surface, Wall	Finishes Black


Models

Code	Voltage	Flux	CRI	Size	Beam
SL0107	24 V DC	3*560 lm	97 CRI	Pole Ø40 x H1015 mm; head Ø60 x L89 mm; base Ø60 mm	15° 24° 36° 50°

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for SL0107, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

SL0107, 15° beam

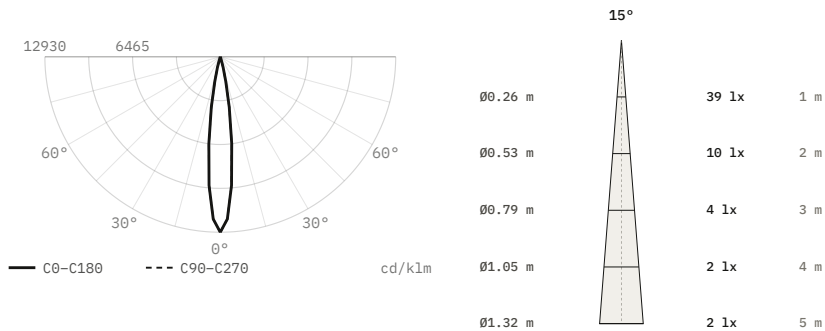


Luminous flux	3 lm
Peak intensity	39 cd, 12,930 cd/klm
Beam angle (50%)	15°
Field angle (10%)	27.3°
Cut-off angle (2.5%)	17°
Flux 0–30° / 30–60° / 60–90°	100 / 0 / 0 %
Size	Ø40 × 1015 mm
Data	Calculated from catalogue data

SL0107, 24° beam

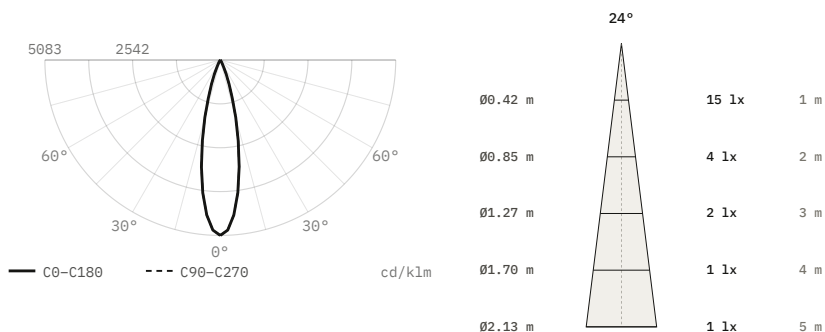


Luminous flux	3 lm
Peak intensity	15 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø40 × 1015 mm
Data	Calculated from catalogue data

SL0107, 36° beam

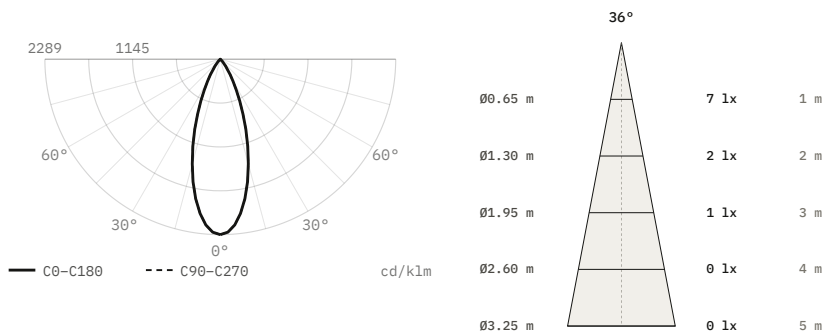

Luminous flux	3 lm
Peak intensity	7 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø40 × 1015 mm
Data	Calculated from catalogue data

SL0107, 50° beam

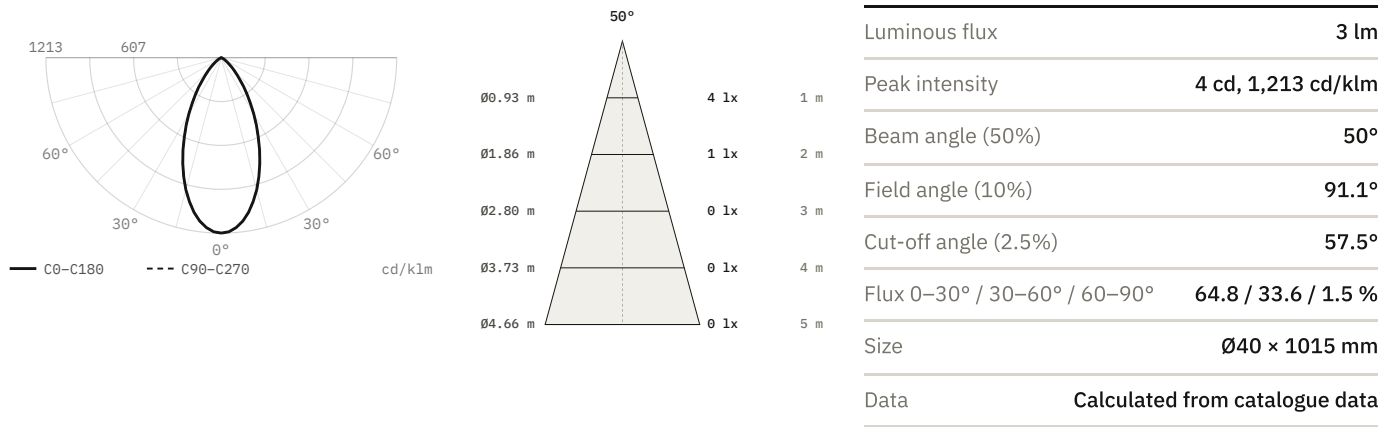

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.