

Wall

Star DL0573

Wall light




Wall light.

- Ceiling cut-out Ø34 mm
- LED source: Citizen

Voltage max 3 V	Luminous flux 40 / 100 lm	Colour temperature 2700 K, 3000 K, 4000 K
CRI 97 CRI	Beam angles 24°, 36°	IP rating IP65
Certifications CE	Mounting Recessed, Wall	

Dimensions

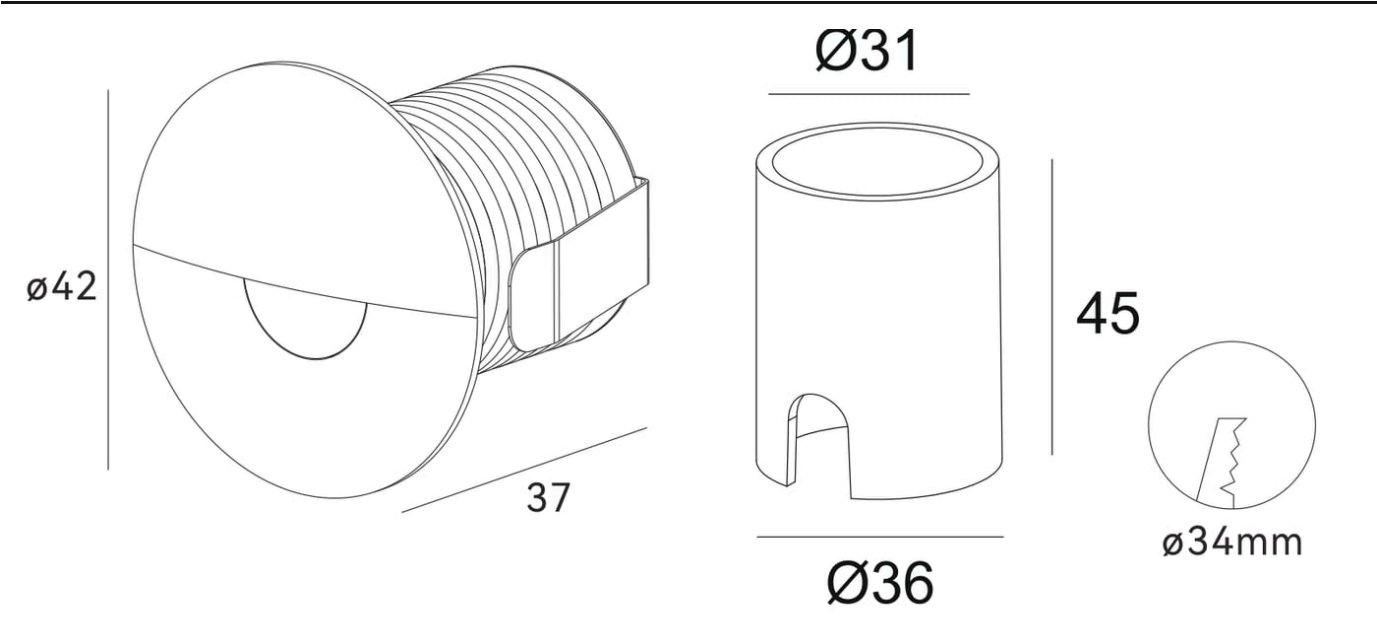


Models

Code	Voltage	Flux	CRI	Size	Cut-out	Beam	Notes
DL0573	max 3 V	40 / 100 lm	97 CRI	Ø42 × 37 mm (flange); body Ø31/Ø36 × 45 mm	Ø34 mm	24° 36°	350 / 700 mA

Photometry


Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL0573, from the same data as the IES and LDT files on the product page. Calculated from catalogue data, not measured with a goniophotometer. Other models with the same beam share this distribution, scaled to their luminous flux.

DL0573, 24° beam

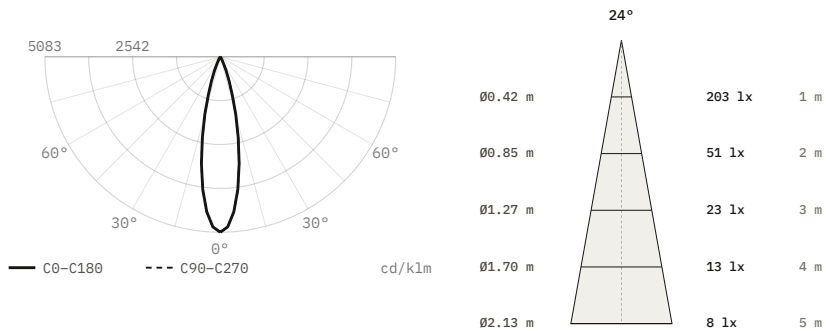

Luminous flux	40 lm
Peak intensity	203 cd, 5,083 cd/klm
Beam angle (50%)	24°
Field angle (10%)	43.7°
Cut-off angle (2.5%)	27.5°
Flux 0–30° / 30–60° / 60–90°	98.7 / 1.3 / 0 %
Size	Ø42 × 37 mm
Data	Calculated from catalogue data

DL0573, 36° beam

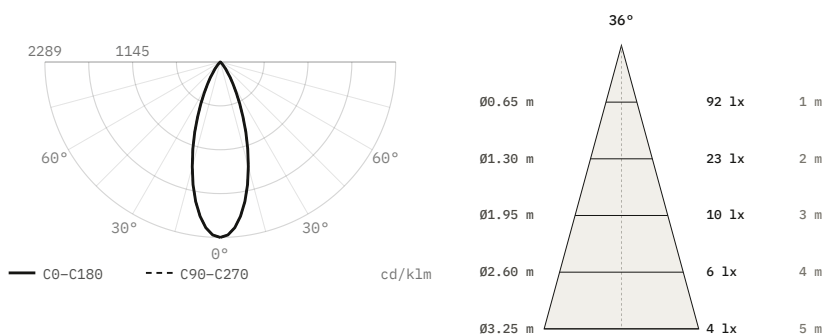

Luminous flux	40 lm
Peak intensity	92 cd, 2,289 cd/klm
Beam angle (50%)	36°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	41.5°
Flux 0–30° / 30–60° / 60–90°	86.1 / 13.9 / 0 %
Size	Ø42 × 37 mm
Data	Calculated from catalogue data