

Wall

Star DL1199

Wall light




Wall light. 2 W. 2700, 3000, 4000 K. IP67. 97 CRI.

- Ceiling cut-out Ø40 mm
- LED source: Citizen

Power 2 W	Voltage max 3 V	Luminous flux 100 lm
Colour temperature 2700 K, 3000 K, 4000 K	CRI 97 CRI	IP rating IP67
Certifications CE	Mounting Recessed, Wall	Finishes White

Dimensions

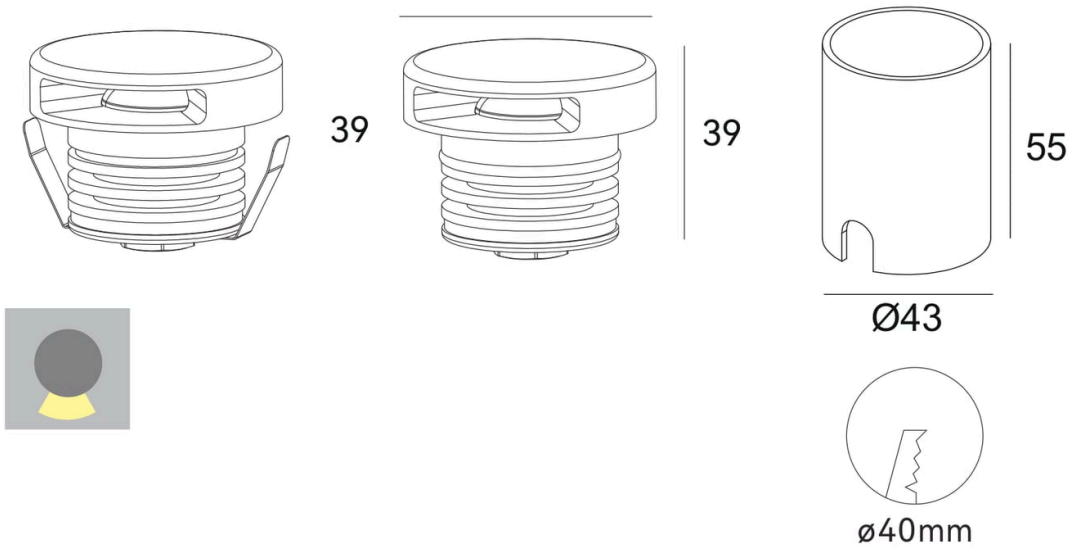


Models

Code	Power	Voltage	Flux	CRI	Size	Cut-out	Notes
DL1199	2 W	max 3 V	100 lm	97 CRI	Ø50 × 39 mm (flange); body Ø39/Ø43 × 55 mm	Ø40 mm	700 mA

Photometry

Polar curve, on-axis illuminance with beam diameter at 1–5 m, and key figures for DL1199, from the same data as the IES and LDT files on the product page. Measured with a goniophotometer in the laboratory; each file gives the test date.

DL1199, 3.2 W, 3000 K, 49.6° beam, measured

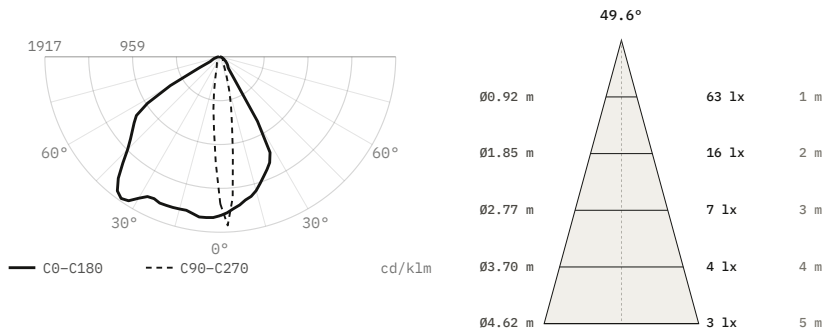

Luminous flux	36 lm
Efficacy	11 lm/W
Peak intensity	69 cd, 1,917 cd/klm
Beam angle (50%)	49.6°
Field angle (10%)	65.6°
Cut-off angle (2.5%)	78°
Flux 0–30° / 30–60° / 60–90°	52.6 / 41.4 / 6 %
Size	Ø50 × 39 mm
Data	Measured with a goniophotometer (EVERFINE GO-2000B), 6 February 2026

DiaNoche
service@dianoche.it
dianoche.it

Technical data may change without notice.